

LED

UV-STOP PC

Input	Voltage	LED Current	Efficiency	Temperature Range	Life	CRI	CCT
I	120-277 V. 50 / 60Hz	700mA	> 0.95	-35 °C +45 °C.	> 30,000	ra > 75	3000K-6500K

Ymeled-6218
4
8W
500-600LM
5 / 4.5kgs
250x250x830mm




YMLED-6218B



PRODUCT DETAILS



PRODUCT DIMENSIONS(MM)

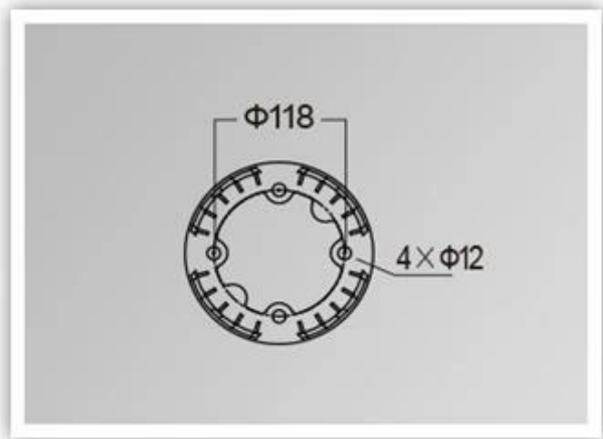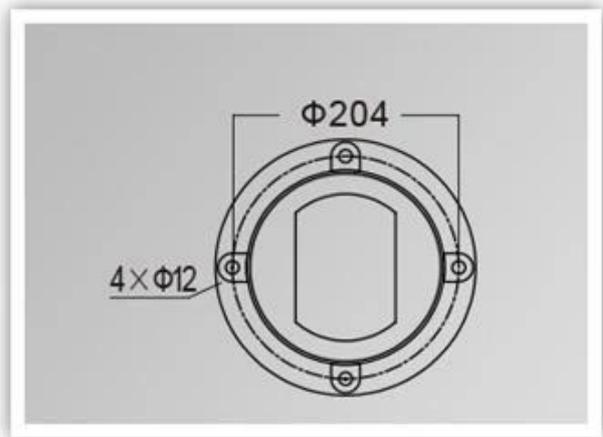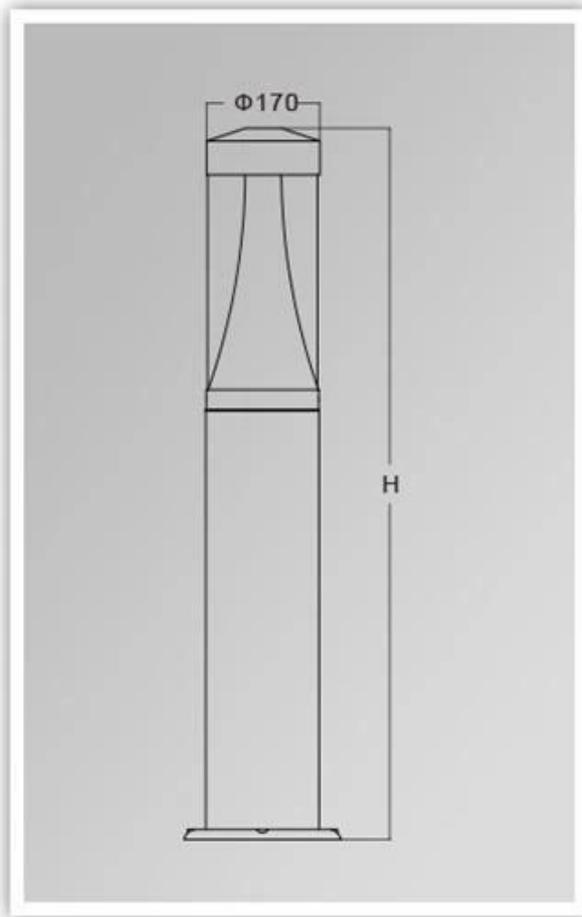

- 1. FedEx / DHL / UPS / TNT
- 2. fcl; /
- 3.
- 4. 5. - 7; 15. - 30.

- 1. T / T. MoneyGram; paypal; 30; 70
- 2. MOQ 1
- 3. 5