



UV-STOP PC

### LED

Input	Output	LED	Efficiency	Temperature	Life	Beam Angle	CCT
I	120-277V. 50 / 60Hz.	700mA	> 0.95	-40 °C +55 °C.	> 50,000hrs.	ra > 75.	3000K-6500K.


Model	Ymled-6101	Ymled-6101	Ymled-6101
LED	16	24	28PCS.
Power	35W	55W.	60W
Beam Angle	2900-3100LM.	4150-4400lm.	5000-5300LM.
G.W / N.W.	12.5 / 11kgs.	12.5 / 11kgs.	12.5 / 11kgs.
Dimensions	570x570x570mm.	570x570x570mm.	570x570x570mm.





# YMLED-6101





## PRODUCT DIMENSIONS(MM)

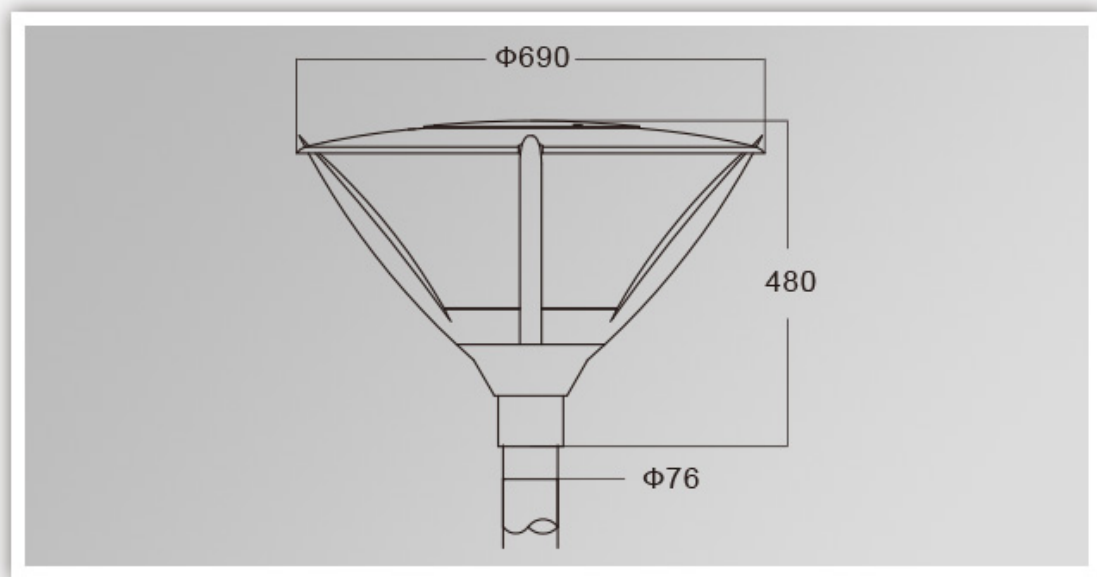

# PRODUCT DETAILS

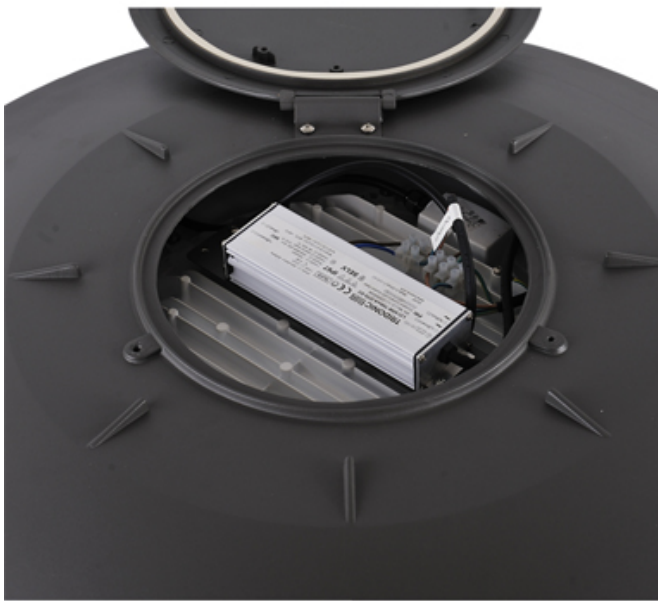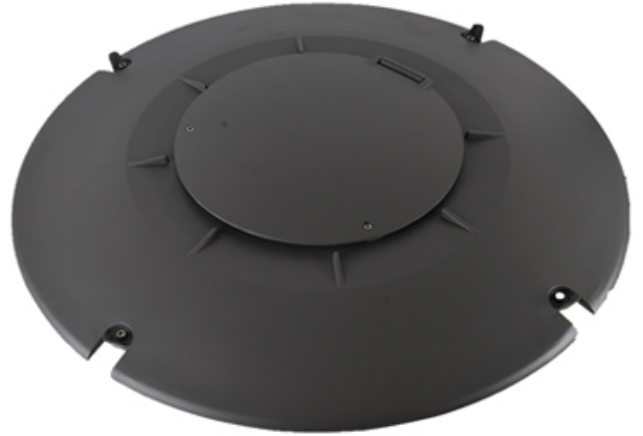

# Polar Diagram

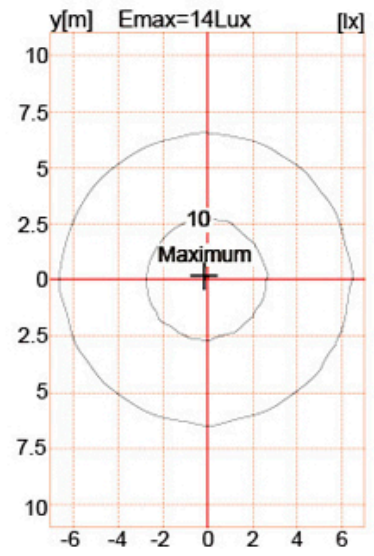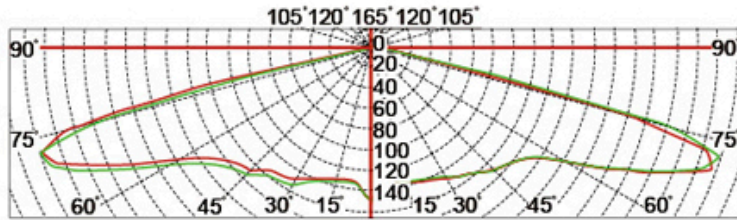

□□

1. FedEx / DHL / UPS / TNT □□ □□□□□□
2. □□□□□□ □□ □□□□fcl;□□/□□□□□□
3. □□□□□□□□□□□□□□□□□□
4. □□□□□□ 5.□□ - 7□; 15. - 30. □□□□□□

□□□□

1. □□□ T / T.□ □□□□□ Moneygram.□ PayPal.; 30□□□□; 70□□□□ □□□□
2. MOQ □ 1□□
3. □□□5□