

## What is the details of our LED Garden light?



Die cast aluminum housing  
Tempered glass mask  
Sealed lamp housing  
Double photometric diffuser technology  
Equipped with NEMA socket

## Configuration Data:


Product Code	Rated Power	LED Qty	Luminous Flux	G.W/N.W	Packing Size	Loading Qty
YMLED-6145(16)	30W	16	3900	7.1/5.6(kgs)	560*560*220mm	320PCS/20'GP
YMLED-6145(20)	40W	20	5200	7.1/5.6(kgs)	560*560*220mm	840PCS/40'HQ
YMLED-6145(24)	55W	24	7150	7.1/5.6(kgs)	560*560*220mm	
YMLED-6145(28)	60W	28	7800	7.1/5.6(kgs)	560*560*220mm	
YMLED-6145(32)	70W	32	9100	7.1/5.6(kgs)	560*560*220mm	
YMLED-6145(36)	80W	36	10400	7.1/5.6(kgs)	560*560*220mm	
YMLED-6145(40)	90W	40	11700	7.1/5.6(kgs)	560*560*220mm	
YMLED-6145(44)	100W	44	13000	7.1/5.6(kgs)	560*560*220mm	
YMLED-6145(48)	105W	48	13650	7.1/5.6(kgs)	560*560*220mm	

## Polar Diagram:


Type1

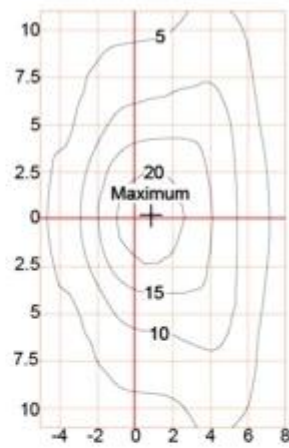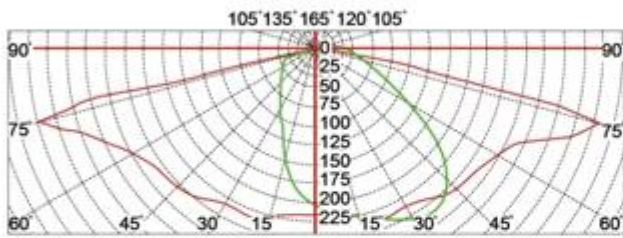

Type2

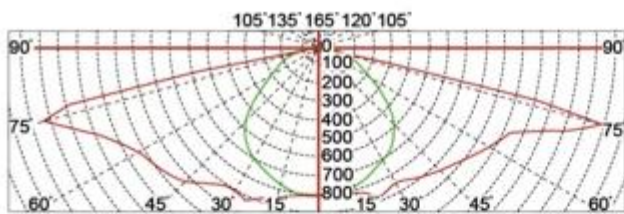

Type3

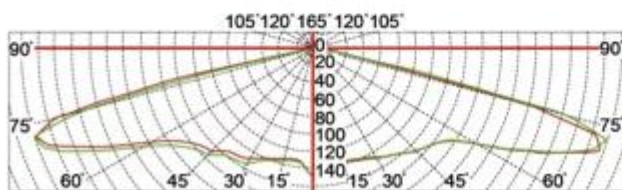



# YMLED6145

RAL 7015



RAL 9005



**Power range: 30w-105w**

**AC120v-277v 50/60Hz**

**CREE XTE LED chip**

**INVENTRONICS driver**

**Die cast aluminum housing**





IP65

## Certificate



# Product Dimensions(mm)

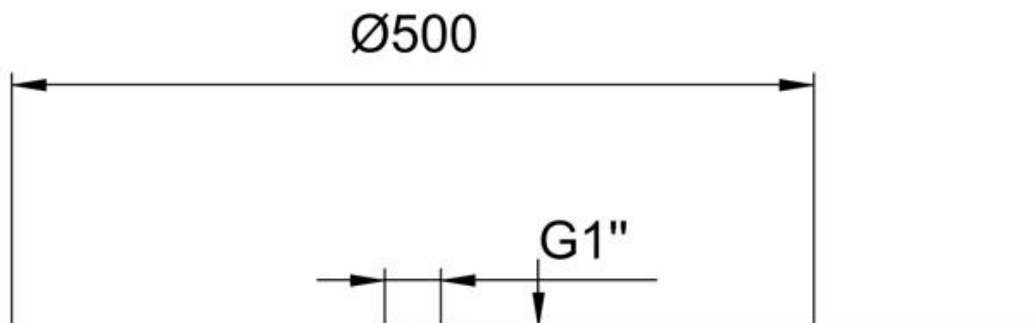

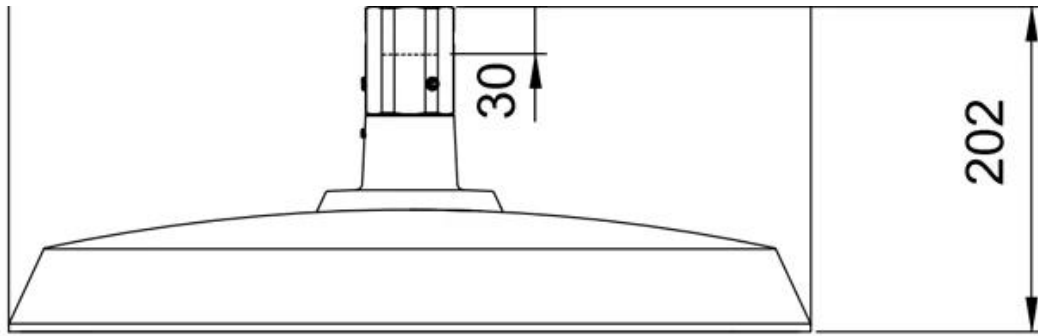

## Configuration Data:

# Internal Structure

Die cast aluminum housing

Tempered glass

CREE XTE LED chip

Install pipe D76mm

