

LED

1. 产品概述
 2. 产品特点
 3. 技术参数

LED

项目	参数	LED	功率	温度范围	寿命	显色指数	色温
输入电压	220-240V 50 / 60Hz	700mA	> 0.95	- 40. °C + 55°C	> 50,000HRS	RA> 70	3000K-6500K

特点



YMLED-6408L

RAL 7015



RAL 9005



Power range: 80W-180W

CREE XPG3 LED chip

Philips driver

>120LM/W

Quick and tool free open



IP66


IK08




Certificate



Product Dimensions(mm)

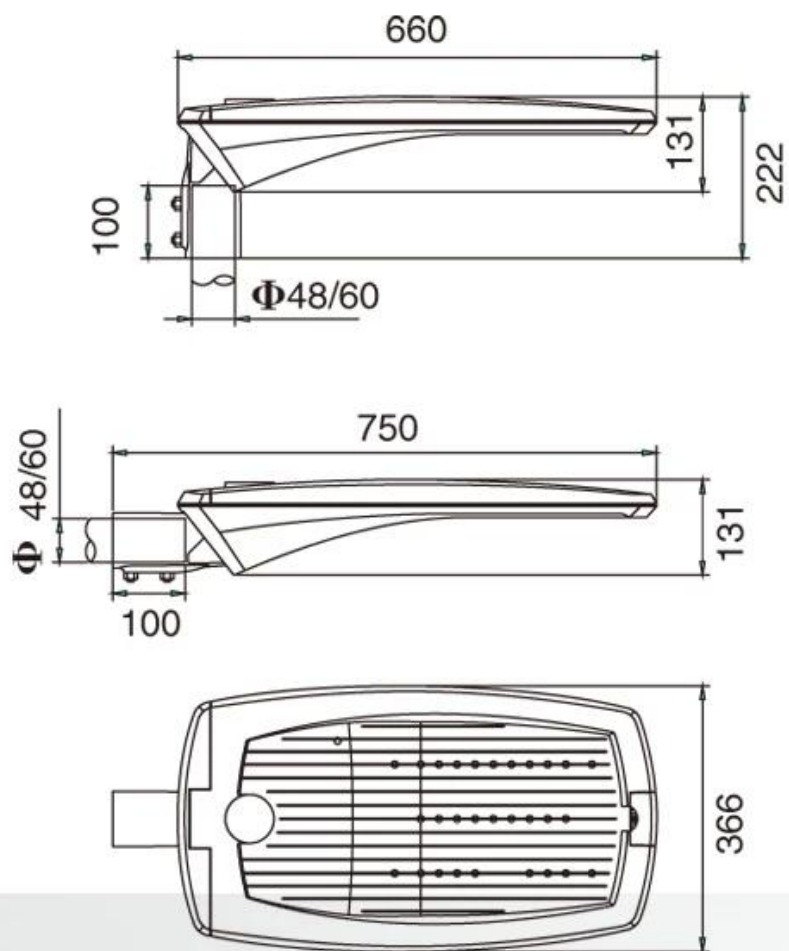


Internal Structure



CREE XPG3 LED chip



Polar Diagram

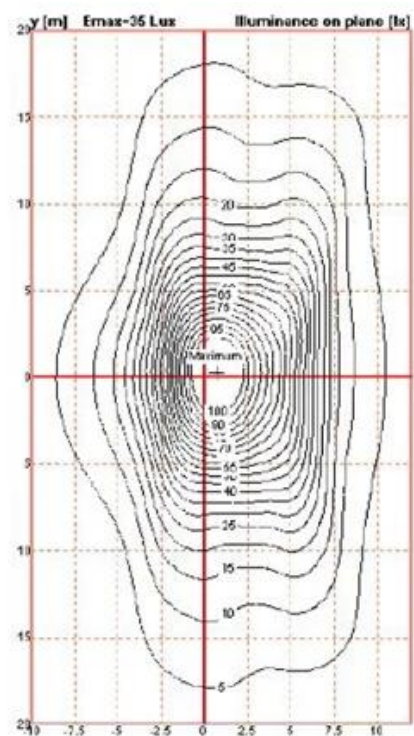

产品型号 Product Code	额定功率 Rated Power (led current 530mA)	初始光通量 Nominal inital FLUX	额定功率 Rated Power (led current 700mA)	初始光通量 Nominal inital FLUX	毛净重 G.W/N.W	包装尺寸 Packing Size
Galaxy max(48)	80W	10304lm	104W	12544lm	9/10(kgs)	770*400*160MM
Galaxy max(64)	105W	13440lm	140W	16800lm	9/10(kgs)	770*400*160MM
Galaxy max(80)	135W	17024lm	180W	21056lm	9/10(kgs)	770*400*160MM



11

3.□□□5□