

UV-STOP PC

UV-STOP PC
 UV-STOP PC
 UV-STOP PC

LED


| 項目 | 仕様 | LED仕様 | 色温度 | 動作温度 | 寿命 | 防眩 | 色温度 |
|------------|-----------------------|--------|----------------|---------------------|----------------|--------|-------------|
| 入力電圧 | 120-277V 50 / 60Hz | 700mA. | > 0.95 | - 40. °C ~ + 55 °C. | > 50,000HRS | RA> 75 | 3000K-6500K |
| LEDタイプ | YMLED-6101□16□ | | YMLED-6101□24□ | | YMLED-6101□28□ | | |
| LED数 | 16個 | | 24個 | | 28個 | | |
| 消費電力 | 35W | | 55W | | 60w. | | |
| 光束 | 2900-3100LM | | 4150-4400LM | | 5000-5300LM | | |
| G.W / N.W. | 12.5 / 11kgs | | 12.5 / 11kgs | | 12.5 / 11kgs | | |
| 寸法 | 570x570x570mm | | 570x570x570mm | | 570x570x570mm | | |

UV-STOP PC


YMLED-6101





PRODUCT DIMENSIONS(MM)

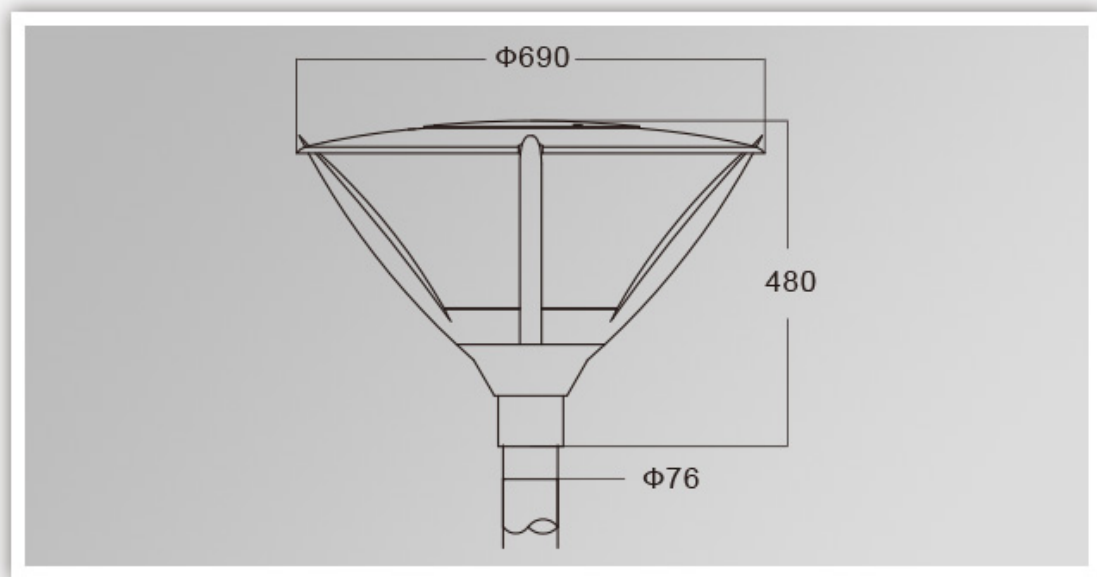

PRODUCT DETAILS

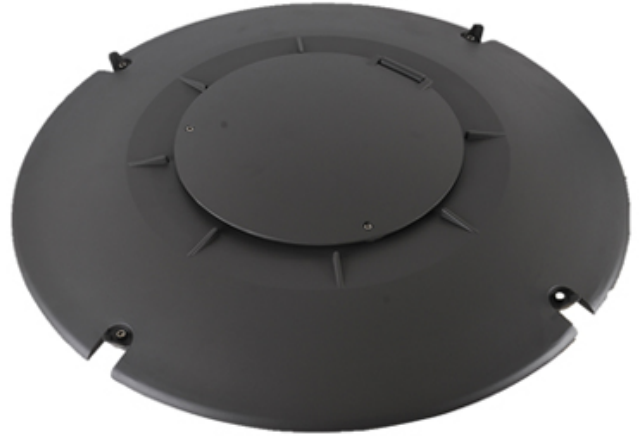

Polar Diagram

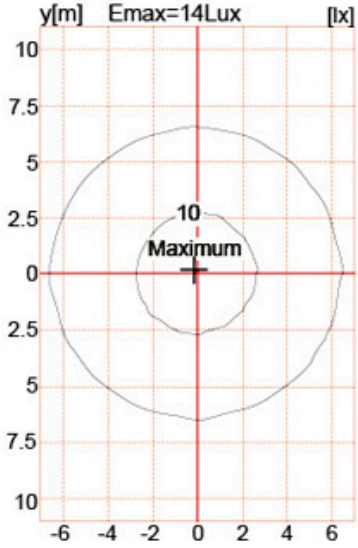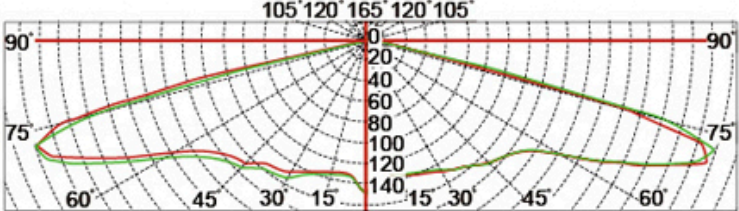

- 1. / DHL / UPS / TNT.
- 2. FCL/
- 3.
- 4. 5. -7 15 - 30.
- 1. T / T. ; 30 ; 70
- 2. MOQ 1
- 3. 5