

LED 120-277V 50 60 Hz 700mA 0.95 -40 °C ~ +55 °C > 50,000 75 3000 K-6500 K

120-277V
 50 60 Hz
 700mA 0.95
 -40 °C ~ +55 °C
 > 50,000
 75
 3000 K-6500 K

LED 120-277V 50 60 Hz 700mA 0.95 -40 °C ~ +55 °C > 50,000 75 3000 K-6500 K

Item	120-277V 50 60 Hz	LED 700mA & 0.95	Temp - 40. ° C ~ + 55. (°)	Life & gt; 50,000	Temp R & Gt; 75.	Temp 3000 K-6500 K.
Item	120-277V. 50 60 Hz.	700mA. & 0.95.	- 40. ° C ~ + 55. (°)	& gt; 50,000	R & Gt; 75.	3000 K-6500 K.
Item		ymled-6404 (15)		ymled-6404 (20)		ymled-6404 (25)
LED		15.		20pcs.		25.
Item		30		45		55
Item		2750-2940lm.		4150-4400lm.		5000-5390lm.
gw / n.		7.2 6.2 kgs		7.2 6.2 kgs		7.2 6.2 kgs
Item		670x305x200mm.		670x305x200mm.		670x305x200mm.


LED 120-277V 50 60 Hz 700mA 0.95 -40 °C ~ +55 °C > 50,000 75 3000 K-6500 K

YMLED-6404




PRODUCT DETAILS



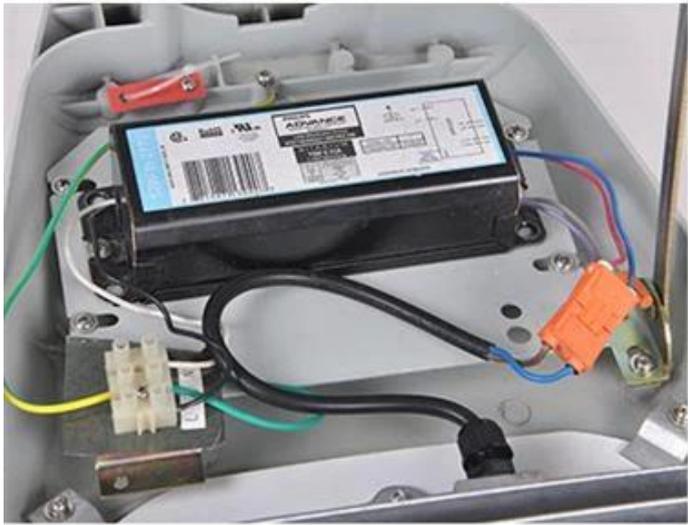

POLAR DIAGRAM

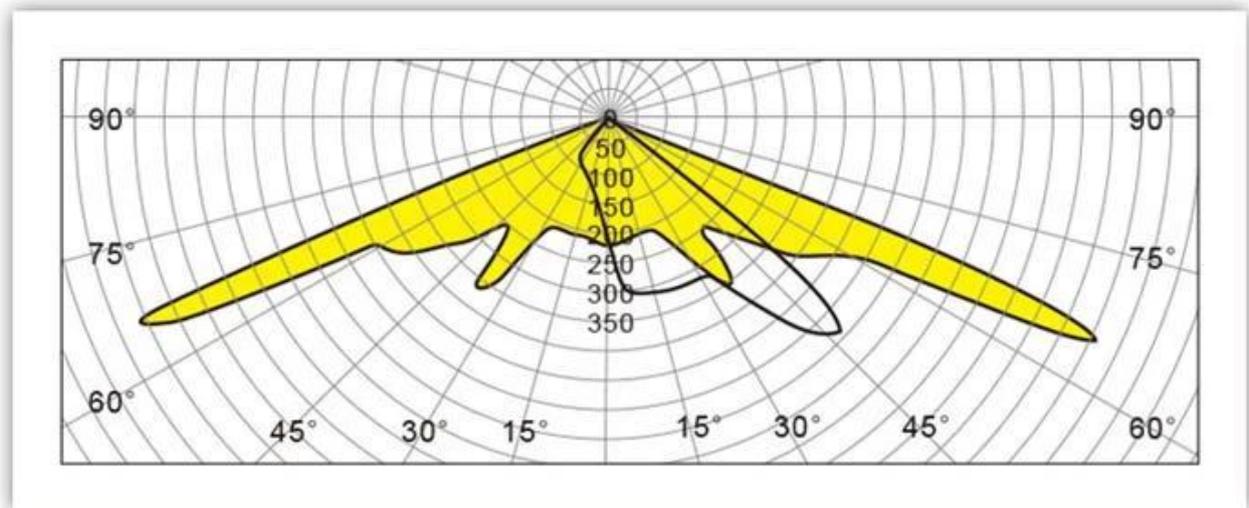

PRODUCT DIMENSIONS(MM)

