What our data bollard outdoor Light?

Die-cast aluminum alloy, powder coating surface treatment of Electricity UV pause PC lampshade Lampshade seal


What are our specific Garden lights?


insulation layer	Supply	Protection Class	The ability to Corronsion	Work environment	Arc lamp	Maximum power
first degree	220V 50/60 Hz	IP65	Average	-35 ° C to +45 C	E27	35W


Product Image

YMLED-6201C

PRODUCT DIMENSIONS(MM)

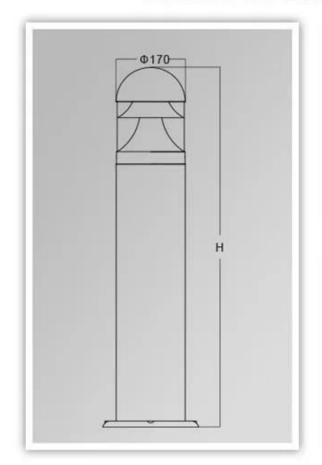





PRODUCT DETAILS



Packaging and amplifier, transport and trade in terms of:

Transfer

- 1. FedEx / DHL / UPS / TNT to me a sample, Delivery,
- 2. By air or sea, to me campaignFCL, received the airport / port,
- 3. transportation of goods or customer specific transfer,
- 4. **Delivery time**: 5Today -7 samples. 15 30 Transfer today.

Payment methods

- 1. Payment: **T / T, Western Union, MoneyGram, PayPal**. **30% deposit**. **70% of the balance** Before shipment,
- 2. MOQ: 1,
- 3. includes Hong Kong, Macao and Taiwan regions guarantee