# What are the details of our LED Light Bard.?

Die-cast aluminum housing, surface treatment for electrostaic coating UV-Stop PC lamp cover Sealed lamp housing

# What are the specifications of ours **CARRIED Light Bard**.?

Insulation class	Power supply	LED Current	Power factor	Work environment	Duration	CRI.	CCT.
Class I.	120-277 V. 50 / 60Hz.	700mA.	> 0.95.	-35. ° C to +45 ° C.	> 30,000 hours	RA> 75.	3000K-6500K.

Product code
 Qty LED.

Nominal power
Luminous flux
G.W / N.W.
Packing size

Ymeled-6218. 4 pcs. 8W. 500-600lm. 5 / 4.5kgs. 250x250x830mm.


# Product photo.


# **YMLED-6218B**


# PRODUCT DETAILS



# PRODUCT DIMENSIONS(MM)

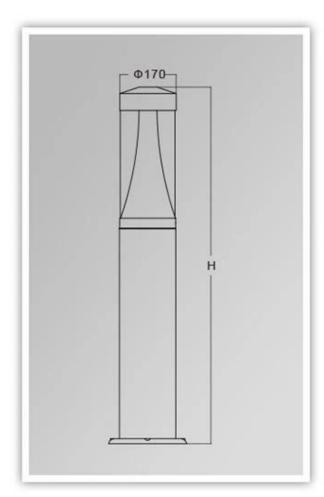





# Packaging and shipping, Business terms:

### **Shipment**

- 1. FedEx / DHL / UPS / TNT for samples, Door to door,
- 2. By air or by sea for Batches, for FCL; Airport / port that receives,
- 3. Customers who specify trade shippers or shipping methods,
- 4 **Delivery time**: 5-7 days for samples; 15-30 Days for batch goods.

### **Payment terms**

- 1. Payment: **T / T.**, **Western Union**, **Moneygram.**, **Paypal.**; **30% deposits**; **70% balance** before the delivery,
- 2. MOQ: 1pcs,
- 3. Warranty: 5 years