

## What is the details of our LED Garden light?

Die cast aluminum housing,surface treatment for electrostaic power coating  
UV-stop PC lamp cover  
Sealed lamp housing


## What is the Specifications of our LED Garden light?

Insulation class	Power supply	LED current	Power Factor	Working Ambient	Life span	CRI	CCT
Class I	120-277V 50/60HZ	700mA	>0.95	-35 °C to +45 °C	>30,000hrs	RA>75	3000K-6500K


Product Code	YMLED-6307
LED Qty	13pcs
Rated Power	30w
Luminous Flux	2000lm
G.W/N.W	15/13kgs
Packing Size	250x250x1830mm

## Product Photos

# YMLED-6307

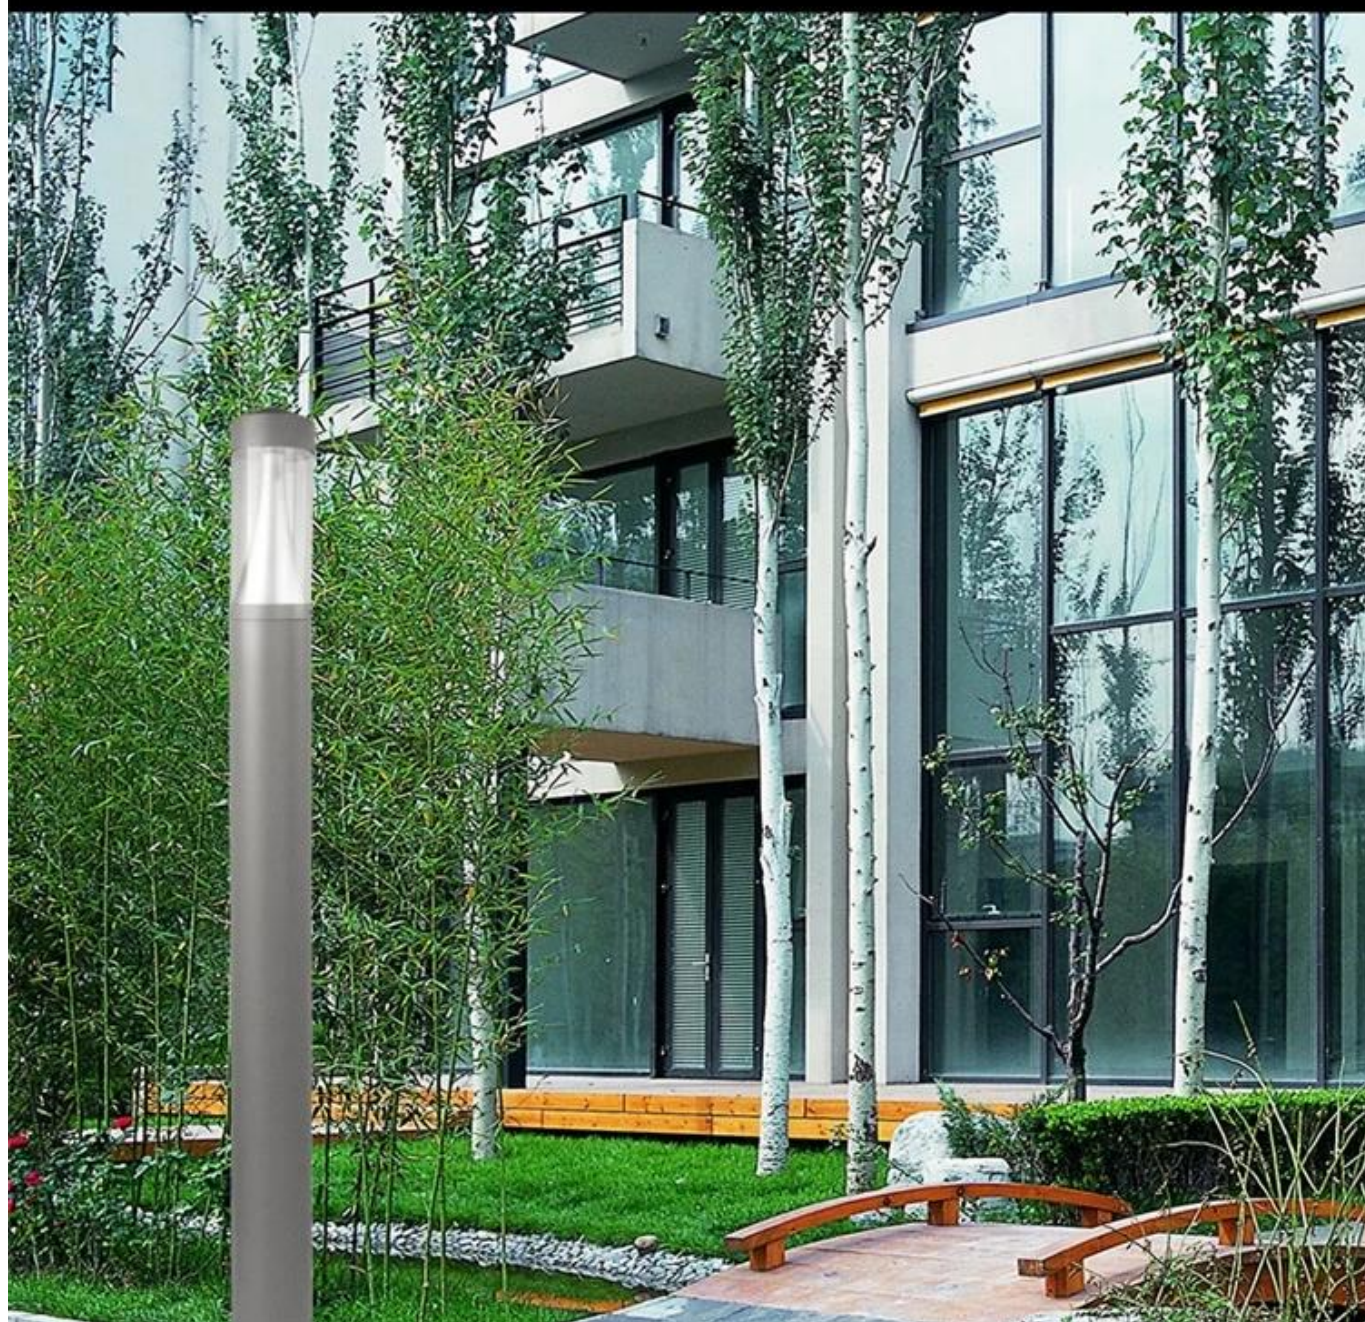

# YMLED-6307



## Product description:

---

- Aluminum die-casting housing.
- Photogy PMMA Diffuser.
- Anti-glare aluminum oxide reflector.
- High power LED with anti-glare diffuser plate.

## Product description:

---

- Protection grade:IP65
- Corrosion-proof capability:II
- Working condition:-35°C~ +45°C
- Isolation class:1
- Power voltage:170-220V 50-60Hz
- High:2.8m
- Max power:30W

## Packaging & Shipping ,Trade Terms:

### Shipping

1. **FedEx/DHL/UPS/TNT** for **samples**, Door-to-Door,
2. **By Air or by Sea** for **batch goods**, for FCL; Airport/ Port receiving,
3. Customers specifying freight forwarders or negotiable shipping methods,
4. **Delivery Time**: 5-7 days for samples; 15-30 days for batch goods.

### Payment Terms

1. Payment: **T/T, Western Union, MoneyGram, PayPal; 30% deposits; 70% balance** before delivery,
2. MOQ: **1pcs**,
3. Warranty: 5years