




配置数据 /Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6136A(16)	30W	16	3600	8.1/6.7 (kgs)	440X440X820mm	130PCS/20'GP 420PCS/40'GP
YMLED-6136A(20)	40W	20	4800	8.1/6.7 (kgs)	440X440X820mm	
YMLED-6136A(24)	55W	24	6490	8.1/6.7 (kgs)	440X440X820mm	

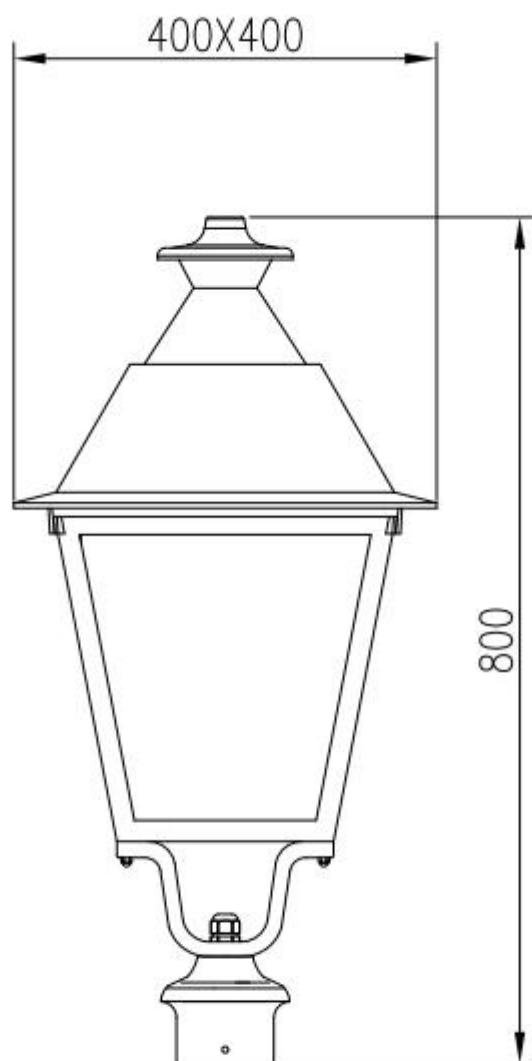

YMLED-6136A



产品说明：

整体铝压铸外壳
二次配光技术
高透钢化玻璃
模组独立密封结构

Product description:

Whole body Aluminum die-casting housing
Double photometric diffuser technology
High-Transparency Tempered Glass
Modular Independent Sealing Structure

灯具尺寸 Product Dimensions(mm)





配置数据 /Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6136A(16)	30W	16	3600	8.1/6.7 (kgs)	440X440X820mm	130PCS/20'GP 420PCS/40'GP
YMLED-6136A(20)	40W	20	4800	8.1/6.7 (kgs)	440X440X820mm	
YMLED-6136A(24)	55W	24	6490	8.1/6.7 (kgs)	440X440X820mm	





配光曲线 Polar Diagram


Type1

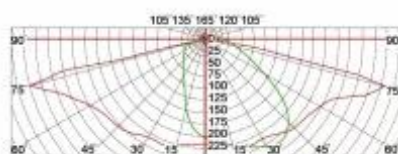

Type2

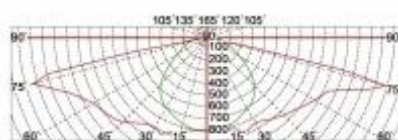

Type3



参考颜色 Reference color : RAL 9005  RAL 7015 

www.ym-lighting.com