

专注照明 25<sup>TH</sup>  
ANNIVERSARY



地址：浙江省余姚市梁弄镇民营工业园区  
Add : Minying industrial Zone, Liangnong Town, Yuyao, Zhenjiang, China

销售服务 /Sale: 0574-22222345 / 22719888  
0574-22672345(Fax)  
技术支持 /Hotline: 0574-62359099  
0574-62359077(Fax)

Http://www.ym-lighting.com  
www.yyym2001.1688.com  
www.yangminglamps.en.alibaba.com



www.ym-lighting.com  
www.yyym2001.1688.com  
www.yangminglamps.en.alibaba.com



Since 2001

# COMPANY PROFILE 企业简介



# YANGMING LIGHTING

余姚市阳明灯具有限公司成立于2001年，是一家从事专业户外照明和生产的企業。在充分引进人才，吸收国内外先进技术的基础上，已成功开发出庭院灯、路灯、草坪灯、步道灯、壁灯五大系列，200余款产品。

公司强大专业的研发队伍和先进完善的销售服务理念，使得我司在国内外有着较高的知名度和市场占有率。同时，我们用诚信的态度面对客户和供应商，恪守承诺，在业界树立了良好的口碑。我们竭诚为每一个客户提供最好的产品和最优质的服务。自成立以来，产品受到世界各国的喜爱，如英国，美国，智利，迪拜，巴西，墨西哥等30多个国家和地区。

新机遇，新挑战。全球景观照明市场，正期待着我们大展宏图。我们本着打造企业宏大品牌的目标，坚持稳健经营，长远发展，不断进行自我创新、技术创新、管理创新。为您提供优质、优价、更时尚的产品。

欢迎各界朋友莅临参观、指导和业务洽谈。

Yuyao Yangming Lighting Co., Ltd. was established in 2001, is an enterprise engaged in professional outdoor lighting and production. On the basis of fully introducing talents and absorbing advanced technology, it has successfully developed five series of Garden Lights, Street Lights, Bollard Lights, Walkway Lights and Wall Lights, with more than 200 products.

Strong professional R&D team, advanced improve service concepts make us have a high reputation and market share at home and abroad. At the same time, we face customers and suppliers with integrity, abide by our promises, and establish a good reputation in the industry. We wholeheartedly provide each customer with the best products and the highest quality service. Since its establishment, the products have been loved by countries all over the world, such as the United Kingdom, the United States, Chile, Dubai, Brazil, Mexico and more than 30 countries and regions.

New opportunities, new challenges. The global landscape lighting market is looking forward to our getting ahead. We are in line with the goal of building a grand corporate Hongda brand, adhere to steady operation, long-term development, and constantly carry out self-innovation, technological innovation, and management innovation. Provide you with high-quality, better-priced and more fashionable products.

Friends from all walks of life are welcome to visit, guide and negotiate business.




01



02



03

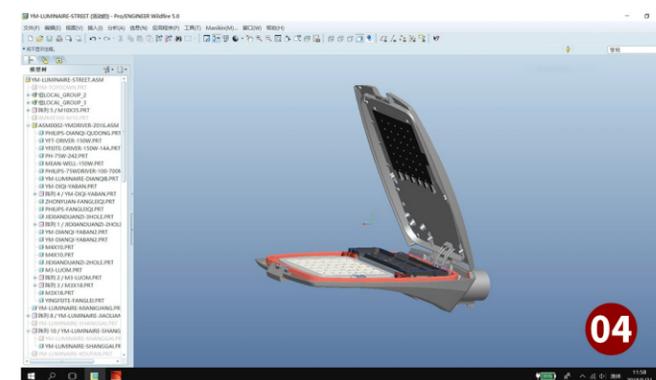

04



05

01. Led Street Lighting Aging Testing Line.

02. Ingress Protection (Ip) Testing Equipment.

03. Ullbrich Sphere For Testing Luminous Flux

04. Product Design

05. Road Lighting Simulation

# QUALIFICATION

企业资质



# Product Contents

产品目录



**01/58**  
Garden Lighting  
庭院灯系列



**59/71**  
Footpath Lighting  
步道灯系列



**72**  
Wall Lighting  
壁灯系列



**73/82**  
Street Lighting  
路灯系列



**83/90**  
Solar Lighting  
太阳能灯具系列



**91/120**  
Lawn Lighting  
草坪灯系列



**119/124**  
LED Module  
模组系列



**125/127**  
Pole  
灯杆系列




### 产品说明 :

- 铝压铸外壳, 铝板旋压灯罩
- 光学级 PMMA 灯罩
- 整体密封结构
- 二次配光技术
- 配 NEMA 接口

### Product description:

- Die cast aluminum housing, Aluminum sheet rotating cover
- Optical grade PMMA lamp shades
- Sealed lamp housing
- Double photometric diffuser technology
- Equipped with NEMA socket

### 灯具尺寸 Product Dimensions(mm)

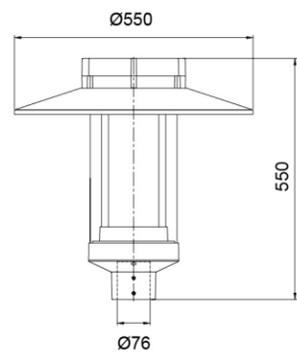



### 配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6107 ( 12 )	20W	12	2320	7.5/6.5(kgs)		
YMLED-6107 ( 16 )	30W	16	3480	7.5/6.5(kgs)	580x265x265mm 1PCS/CTN	480PCS/20'GP
YMLED-6107 ( 20 )	40W	20	4640	7.5/6.5(kgs)	590x590x100mm 3PCS/CTN	1170PCS/40'HQ
YMLED-6107 ( 24 )	55W	24	6380	7.5/6.5(kgs)		





### 配光曲线 Polar Diagram



#### Type1

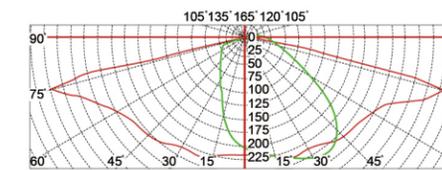

#### Type2

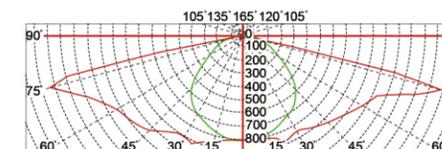

#### Type3



参考颜色 Reference color : RAL 9005 RAL 7015




**产品说明 :**

- 铝压铸外壳
- 光学级 PMMA 灯罩
- 整体密封结构
- 二次配光技术
- 配 NEMA 接口

**Product description:**

- Die cast aluminum housing
- Optical grade PMMA lamp shades
- Sealed lamp housing
- Double photometric diffuser technology
- Equipped with NEMA socket

**灯具尺寸 Product Dimensions(mm)**

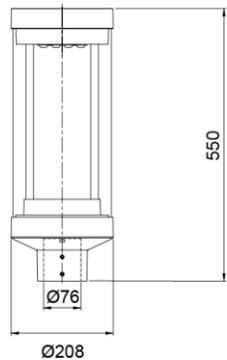


**配置数据 /Configuration Data:**

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6108 ( 12 )	20W	12	2320	6.2/5.2(kgs)	580x265x265mm	
YMLED-6108 ( 16 )	30W	16	3480	6.2/5.2(kgs)	580x265x265mm	672PCS/20'GP
YMLED-6108 ( 20 )	40W	20	4640	6.2/5.2(kgs)	580x265x265mm	1760PCS/40'HQ
YMLED-6108 ( 24 )	55W	24	6380	6.2/5.2(kgs)	580x265x265mm	




**配光曲线 Polar Diagram**


**Type1**

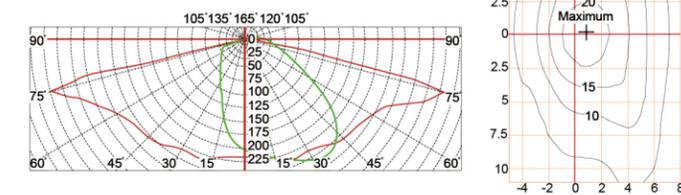

**Type2**

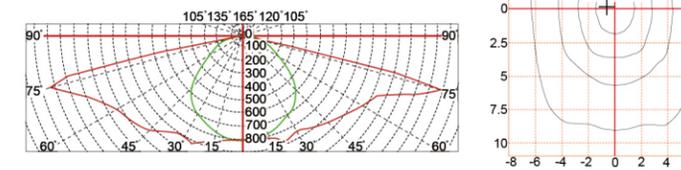

**Type3**

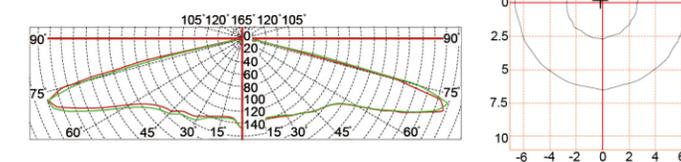


参考颜色 Reference color : RAL 9005  RAL 7015



产品说明：  
 整体铝压铸外壳  
 二次配光技术  
 超白钢化玻璃  
 模组独立密封结构

Product description:  
 whole body Die cast aluminum housing  
 Double photometric diffuser technology  
 Supper white toughened glass  
 Individual and sealed module

### 灯具尺寸 Product Dimensions(mm)




### 配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size
YMLED-6110	30W	16	3600	8.4/7.4(kgs)	480x425x630mm
YMLED-6110	40W	20	4800	8.4/7.4(kgs)	480x425x630mm
YMLED-6110	55W	24	6490	8.4/7.4(kgs)	480x425x630mm




### 配光曲线 Polar Diagram


Type1

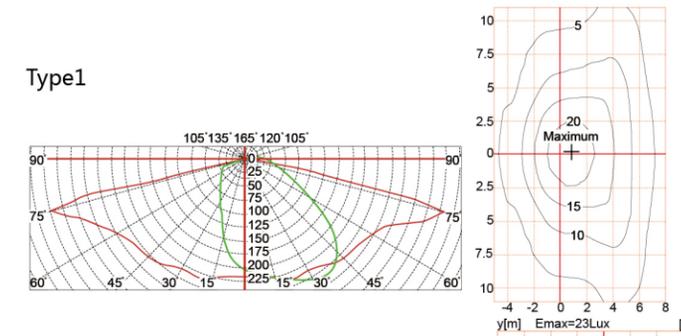

Type2

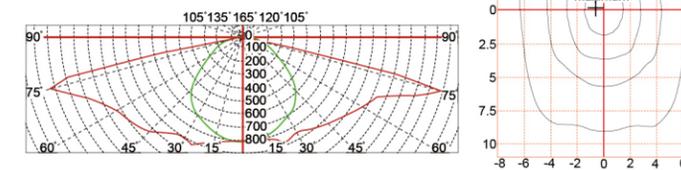

Type3

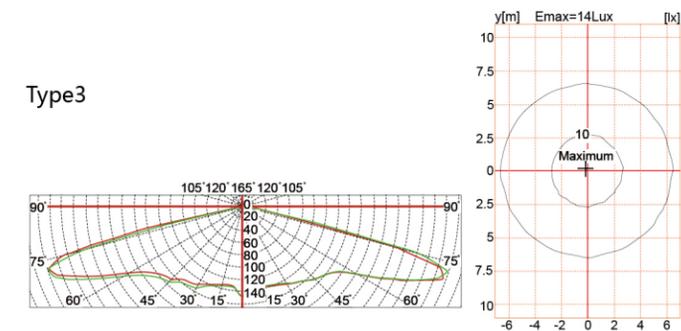




产品说明：  
 铝压铸外壳  
 钢化玻璃面罩  
 整体密封结构  
 二次配光技术  
 配 NEMA 接口

Product description:  
 Die cast aluminum housing  
 Tempered glass mask  
 Sealed lamp housing  
 Double photometric diffuser technology  
 Equipped with NEMA socket

灯具尺寸 Product Dimensions(mm)





配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6142 ( 16 )	30W	16	3690	10.3/8.8(kgs)	560x560x220mm	
YMLED-6142 ( 20 )	40W	20	4920	10.3/8.8(kgs)	560x560x220mm	
YMLED-6142 ( 24 )	55W	24	6765	10.3/8.8(kgs)	560x560x220mm	
YMLED-6142 ( 28 )	60W	28	7380	10.3/8.8(kgs)	560x560x220mm	400PCS/20' GP
YMLED-6142 ( 32 )	70W	32	8610	10.3/8.8(kgs)	560x560x220mm	
YMLED-6142 ( 36 )	80W	36	9840	10.3/8.8(kgs)	560x560x220mm	1008PCS/40'HQ
YMLED-6142 ( 40 )	90W	40	11070	10.3/8.8(kgs)	560x560x220mm	
YMLED-6142 ( 44 )	100W	44	12300	10.3/8.8(kgs)	560x560x220mm	
YMLED-6142 ( 48 )	105W	48	12915	10.3/8.8(kgs)	560x560x220mm	





配光曲线 Polar Diagram



Type1

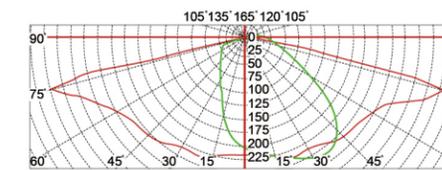

Type2

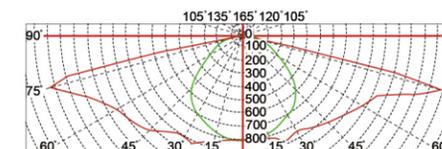

Type3




参考颜色 Reference color : RAL 9005  RAL 7015



产品说明：  
 铝压铸外壳  
 钢化玻璃面罩  
 整体密封结构  
 二次配光技术  
 配 NEMA 接口

Product description:  
 Die cast aluminum housing  
 Tempered glass mask  
 Sealed lamp housing  
 Double photometric diffuser technology  
 Equipped with NEMA socket

灯具尺寸 Product Dimensions(mm)





配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6143 ( 16 )	30W	16	3750	10.3/8.8(kgs)	560x560x220mm	
YMLED-6143 ( 20 )	40W	20	5000	10.3/8.8(kgs)	560x560x220mm	
YMLED-6143 ( 24 )	55W	24	6875	10.3/8.8(kgs)	560x560x220mm	
YMLED-6143 ( 28 )	60W	28	7500	10.3/8.8(kgs)	560x560x220mm	400PCS/20' GP
YMLED-6143 ( 32 )	70W	32	8750	10.3/8.8(kgs)	560x560x220mm	
YMLED-6143 ( 36 )	80W	36	10000	10.3/8.8(kgs)	560x560x220mm	1008PCS/40'HQ
YMLED-6143 ( 40 )	90W	40	11250	10.3/8.8(kgs)	560x560x220mm	
YMLED-6143 ( 44 )	100W	44	12500	10.3/8.8(kgs)	560x560x220mm	
YMLED-6143 ( 48 )	105W	48	13125	10.3/8.8(kgs)	560x560x220mm	





配光曲线 Polar Diagram



Type1

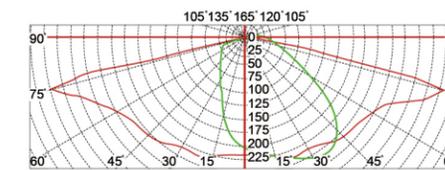

Type2

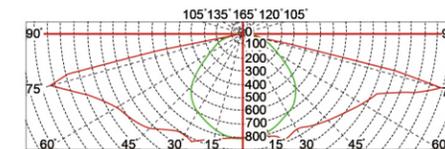

Type3




参考颜色 Reference color : RAL 9005  RAL 7015



产品说明：  
 铝压铸外壳  
 钢化玻璃面罩  
 整体密封结构  
 二次配光技术  
 配 NEMA 接口


Product description:  
 Die cast aluminum housing  
 Tempered glass mask  
 Sealed lamp housing  
 Double photometric diffuser technology  
 Equipped with NEMA socket

灯具尺寸 Product Dimensions(mm)

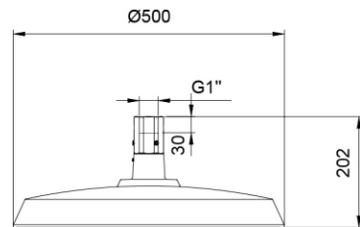



配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6145 ( 16 )	30W	16	3900	7.1/5.6(kgs)	560x560x260mm	
YMLED-6145 ( 20 )	40W	20	5200	7.1/5.6(kgs)	560x560x260mm	
YMLED-6145 ( 24 )	55W	24	7150	7.1/5.6(kgs)	560x560x260mm	
YMLED-6145 ( 28 )	60W	28	7800	7.1/5.6(kgs)	560x560x260mm	320PCS/20' GP
YMLED-6145 ( 32 )	70W	32	9100	7.1/5.6(kgs)	560x560x260mm	
YMLED-6145 ( 36 )	80W	36	10400	7.1/5.6(kgs)	560x560x260mm	840PCS/40' HQ
YMLED-6145 ( 40 )	90W	40	11700	7.1/5.6(kgs)	560x560x260mm	
YMLED-6145 ( 44 )	100W	44	13000	7.1/5.6(kgs)	560x560x260mm	
YMLED-6145 ( 48 )	105W	48	13650	7.1/5.6(kgs)	560x560x260mm	





配光曲线 Polar Diagram



Type1

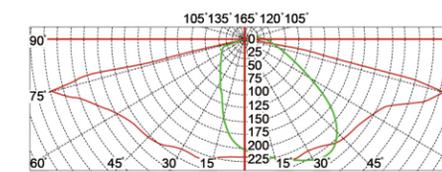

Type2

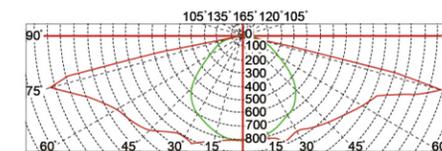

Type3

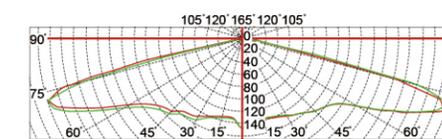

参考颜色 Reference color : RAL 9005  RAL 7015




**产品说明：**

- 整体铝压铸外壳
- 间接反光设计 出光更加柔和
- 配置高效反光器
- 外置电源

**Product description:**

- whole body Die cast aluminum housing
- Indirect reflective design, the lighting isn't blinding
- Configure high-efficiency reflector
- External driver


**灯具尺寸 Product Dimensions(mm)**



**配置数据 / Configuration Data:**

产品型号 Product Code	额定功率 Rated Power	初始光通量 Luminous Flux	毛净重 G.W/N.W
YMLED-6146	30W	3240	10/8.5(kgs)
YMLED-6146	40W	4320	10/8.5(kgs)
YMLED-6146	55W	5940	10/8.5(kgs)

**配光曲线 Polar Diagram**

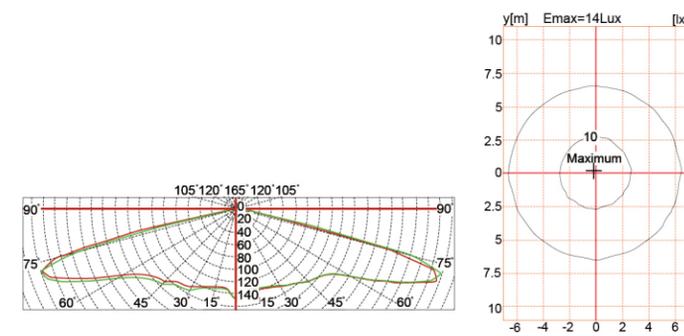

参考颜色 Reference color : RAL 9005  RAL 7015




**产品说明：**

整体铝压铸外壳  
间接反光设计 出光更加柔和  
配置高效反光器  
外置电源

**Product description:**

whole body Die cast aluminum housing  
Indirect reflective design, the lighting isn't blinding  
Configure high-efficiency reflector  
External driver



**灯具尺寸 Product Dimensions(mm)**

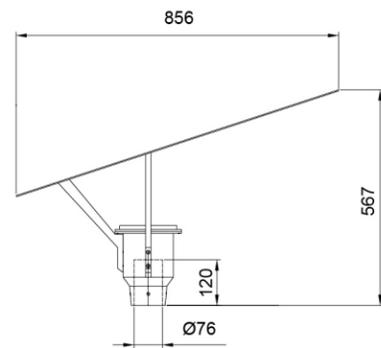

**配置数据 /Configuration Data:**

产品型号 Product Code	额定功率 Rated Power	初始光通量 Luminous Flux	毛净重 G.W/N.W
YMLED-6146B	30W	3240	10/8.5(kgs)
YMLED-6146B	40W	4320	10/8.5(kgs)
YMLED-6146B	55W	5940	10/8.5(kgs)

**配光曲线 Polar Diagram**

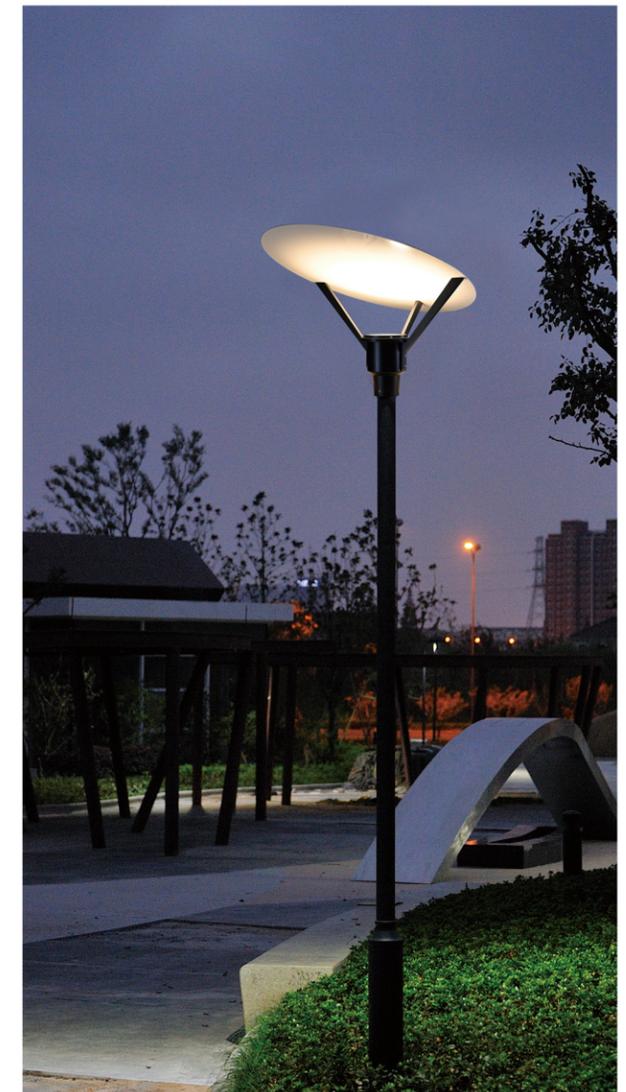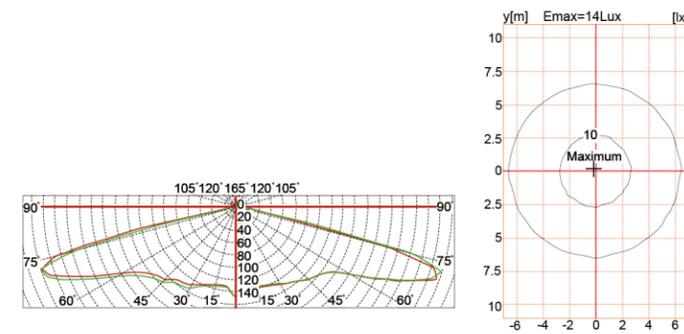


参考颜色 Reference color : RAL 9005  RAL 7015



产品说明：  
旋压外壳  
二次配光技术  
抗 UV PC 灯罩  
整体密封结构

Product description:  
Spinning aluminum housing  
Double photometric diffuser technology  
UV-stop PC lamp cover  
Sealed lamp housing

灯具尺寸 Product Dimensions(mm)




配置数据 / Configuration Data:


产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6139(16)	30W	16	3750	7.4/6.5(kgs)	600x600x540mm	
YMLED-6139(20)	40W	20	5000	7.4/6.5(kgs)	600x600x540mm	108PCS/20'GP
YMLED-6139(24)	55W	24	6930	7.4/6.5(kgs)	600x600x540mm	
YMLED-6139(28)	60W	28	7560	7.4/6.5(kgs)	600x600x540mm	228PCS/40'HQ
YMLED-6139(32)	70W	32	8610	7.4/6.5(kgs)	600x600x540mm	

配光曲线 Polar Diagram


Type1

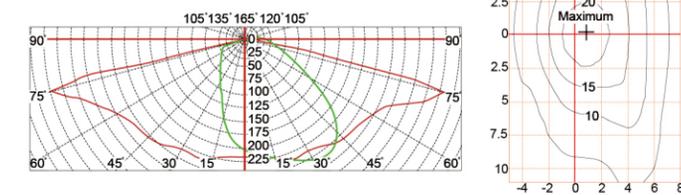

Type2

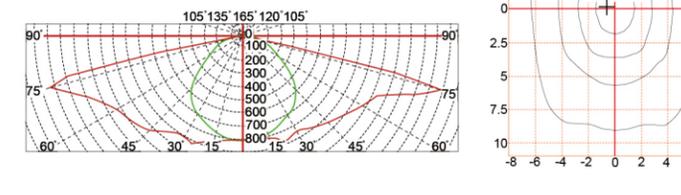

Type3

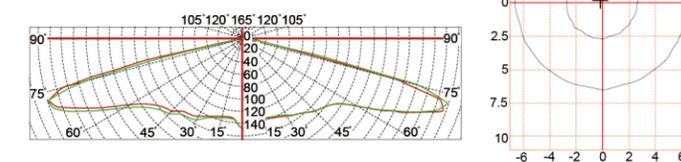


参考颜色 Reference color : RAL 9005 ■ RAL 7015 ■



产品说明：  
 旋压外壳  
 二次配光技术  
 抗 UV PC 灯罩  
 整体密封结构

Product description:  
 Spinning aluminum housing  
 Double photometric diffuser technology  
 UV-stop PC lamp cover  
 Sealed lamp housing

灯具尺寸 Product Dimensions(mm)




配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6139B(16)	30W	16	3750	8.6/7.6(kgs)	600x600x540mm	
YMLED-6139B(20)	40W	20	5000	8.6/7.6(kgs)	600x600x540mm	108PCS/20'GP
YMLED-6139B(24)	55W	24	6600	8.6/7.6(kgs)	600x600x540mm	228PCS/40'HQ
YMLED-6139B(28)	60W	28	7200	8.6/7.6(kgs)	600x600x540mm	
YMLED-6139B(32)	70W	32	8610	8.6/7.6(kgs)	600x600x540mm	




配光曲线 Polar Diagram


Type1

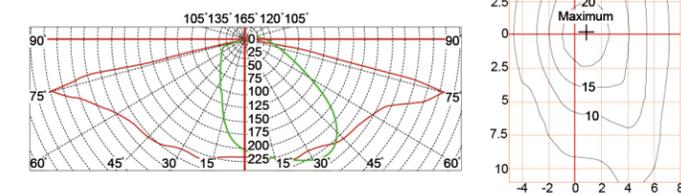

Type2

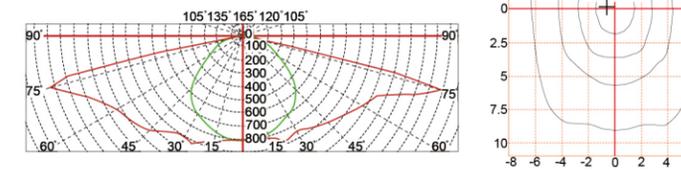

Type3

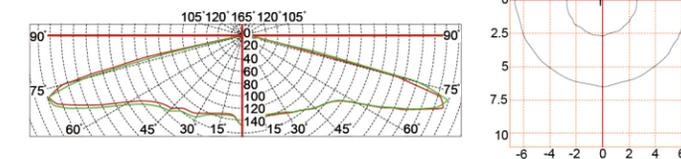

参考颜色 Reference color : RAL 9005 (Black) RAL 7015 (Grey)




**产品说明：**

- 旋压外壳
- 二次配光技术
- 抗 UV PC 灯罩
- 整体密封结构

**Product description:**

- Spinning aluminum housing
- Double photometric diffuser technology
- UV-stop PC lamp cover
- Sealed lamp housing

**灯具尺寸 Product Dimensions(mm)**





**配置数据 / Configuration Data:**

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6140(16)	30W	16	3810	7.5/6(kgs)	605x605x420mm	135PCS/20'GP
YMLED-6140(24)	55W	24	6985	7.5/6(kgs)	605x605x420mm	342PCS/40'HQ
YMLED-6140(32)	70W	32	8890	7.5/6(kgs)	605x605x420mm	





**配光曲线 Polar Diagram**



**Type1**

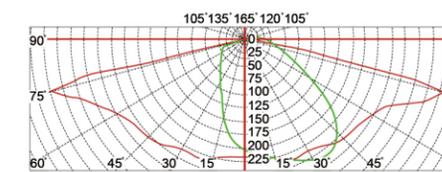

**Type2**

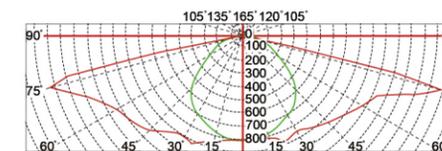

**Type3**

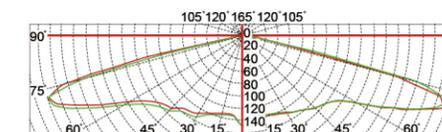


参考颜色 Reference color : RAL 9005  RAL 7015



产品说明：  
旋压外壳  
二次配光技术  
抗 UV PC 灯罩  
整体密封结构

Product description:  
Spinning aluminum housing  
Double photometric diffuser technology  
UV-stop PC lamp cover  
Sealed lamp housing

灯具尺寸 Product Dimensions(mm)

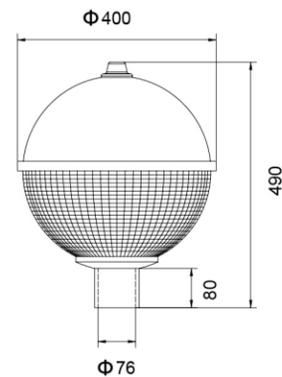


配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLEd-6141(16)	30W	16	3450	5/4(kgs)	415x415x530mm	260PCS/20'GP
YMLEd-6141(24)	55W	24	6325	5/4(kgs)	415x415x530mm	700PCS/40'HQ




配光曲线 Polar Diagram


Type1

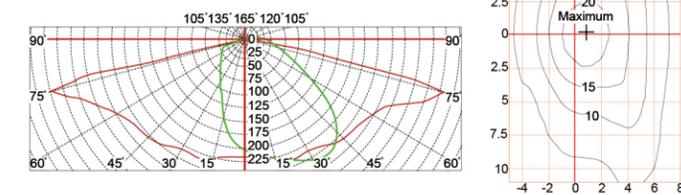

Type2

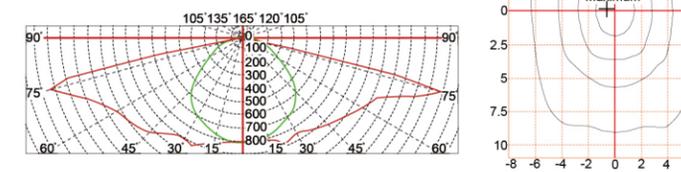

Type3

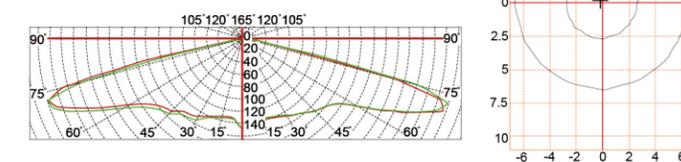

参考颜色 Reference color : RAL 9005  RAL 7015




**产品说明：**

- 整体铝压铸外壳
- 二次配光技术
- 超白钢化玻璃
- 整体密封结构

**Product description:**

- whole body Die cast aluminum housing
- Double photometric diffuser technology
- Supper white toughened glass
- Sealed lamp housing

**灯具尺寸 Product Dimensions(mm)**





**配置数据 /Configuration Data:**

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6113A(16)	30W	16	3600	14.5/12.4(kgs)	715x685x280mm	
YMLED-6113A(20)	40W	20	4800	14.5/12.4(kgs)	715x685x280mm	192PCS/20'HQ
YMLED-6113A(24)	55W	24	6600	14.5/12.4(kgs)	715x685x280mm	459PCS/40'HQ





**配光曲线 Polar Diagram**



**Type1**

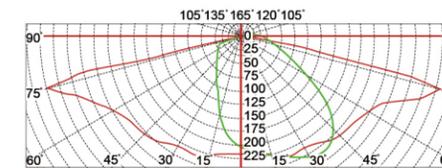

**Type2**

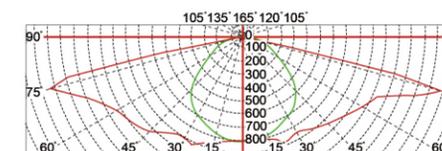

**Type3**

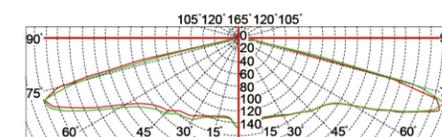

参考颜色 Reference color : RAL 7015  RAL 9005




### 产品说明 :

整体铝压铸外壳  
二次配光技术  
超白钢化玻璃  
整体密封结构

### Product description:


whole body Die cast aluminum housing  
Double photometric diffuser technology  
Supper white toughened glass  
Sealed lamp housing

### 灯具尺寸 Product Dimensions(mm)

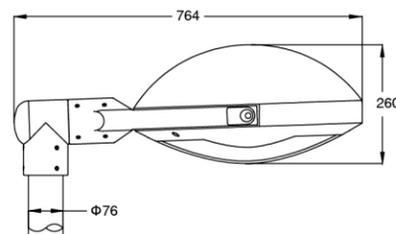



### 配置数据 /Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6113B(16)	30W	16	3600	16.2/14.2(kgs)	715x685x280mm	
YMLED-6113B(20)	40W	20	4800	16.2/14.2(kgs)	715x685x280mm	192PCS/20' GP
YMLED-6113B(24)	55W	24	6930	16.2/14.2(kgs)	715x685x280mm	459PCS/40'HQ





### 配光曲线 Polar Diagram



#### Type1

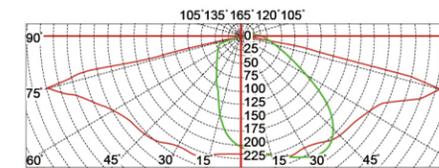

#### Type2

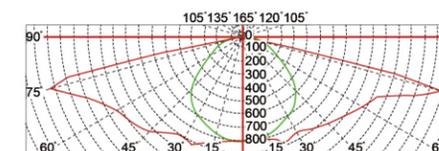

#### Type3

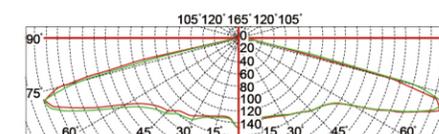


参考颜色 Reference color : RAL 7015 ■ RAL 9005 ■



产品说明：  
 铝压铸外壳  
 PC 扩散技术  
 整体密封结构

Product description:  
 Die cast aluminum housing  
 PC diffusion technology  
 Sealed lamp housing

灯具尺寸 Product Dimensions(mm)


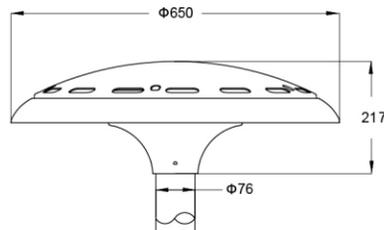


配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6132	45W	180	3850	10.5/9(kgs)	710x285x725mm	192PCS/20' GP
YMLED-6132	70W	180	5950	10.5/9(kgs)	710x285x725mm	432PCS/40' HQ



配光曲线 Polar Diagram

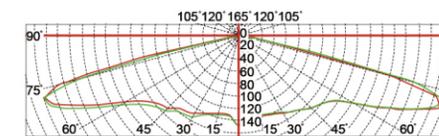


参考颜色 Reference color : RAL 7015  RAL 9005



**产品说明：**  
 铝压铸外壳，铝板旋压顶盖  
 二次配光技术  
 超白钢化玻璃  
 整体密封结构

**Product description:**  
 Die cast aluminum housing, Aluminum sheet rotating cover  
 Double photometric diffuser technology  
 Supper white toughened glass  
 Sealed lamp housing

灯具尺寸 Product Dimensions(mm)





配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6115(16)	30W	16	3690	13.5/11.5(kgs)	780x700x230mm	
YMLED-6115(20)	40W	20	4920	13.5/11.5(kgs)	780x700x230mm	240PCS/20'GP
YMLED-6115(24)	55W	24	6573	13.5/11.5(kgs)	780x700x230mm	528PCS/40'HQ
YMLED-6115(28)	60W	28	7140	13.5/11.5(kgs)	780x700x230mm	
YMLED-6115(32)	70W	32	8610	13.5/11.5(kgs)	780x700x230mm	





配光曲线 Polar Diagram



Type1

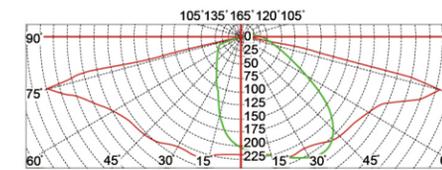

Type2

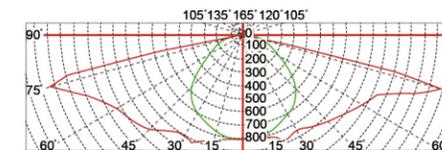

Type3

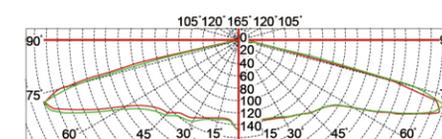


参考颜色 Reference color : RAL 7015  RAL 9005



**产品说明：**  
 铝压铸外壳，铝板旋压顶盖  
 间接照明技术  
 抗 UV PC 灯罩  
 整体密封结构

**Product description:**  
 Die cast aluminum housing, Aluminum sheet rotating cover  
 Indirect lighting technology  
 UV-stop PC lamp cover  
 Sealed lamp housing

灯具尺寸 Product Dimensions(mm)

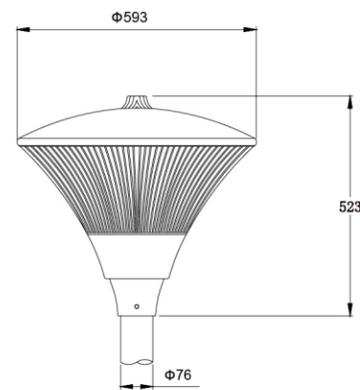



配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W./N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6116(16)	30W	16	3450	8/7(kgs)	540x540x540mm	160PCS/20'GP
YMLED-6116(24)	55W	24	6325	8/7(kgs)	540x540x540mm	336PCS/40'HQ
YMLED-6116(32)	70W	32	8050	8/7(kgs)	540x540x540mm	





配光曲线 Polar Diagram




Type1

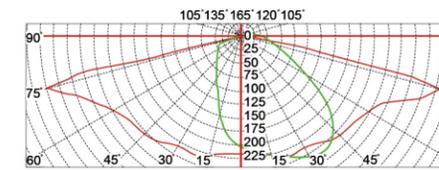

Type2

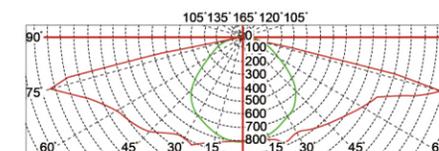

Type3

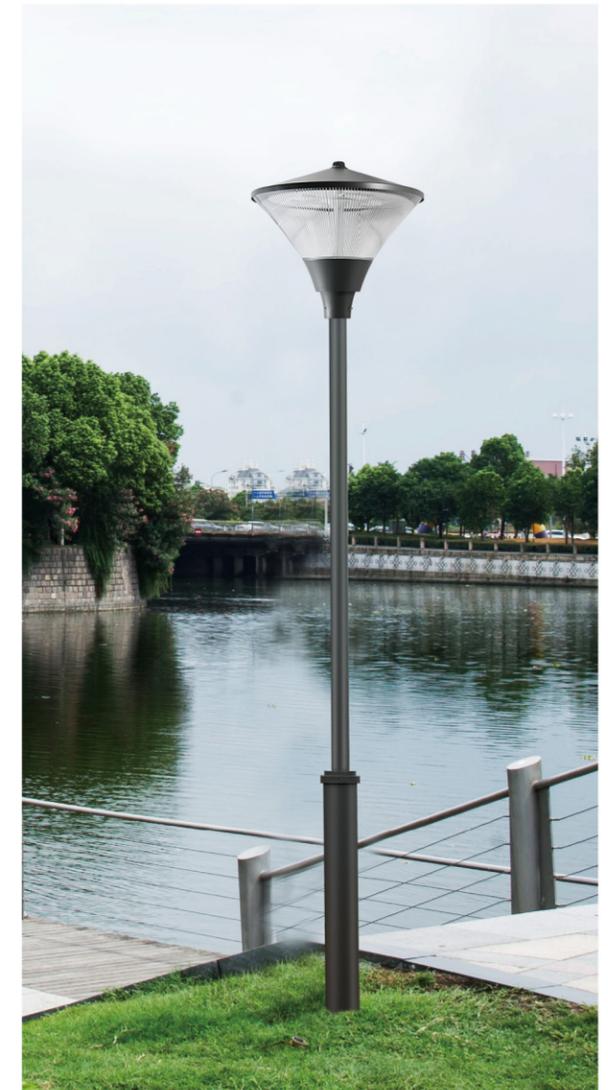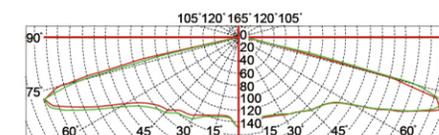

参考颜色 Reference color : RAL 7015  RAL 9005




### 产品说明：

整体铝压铸外壳  
二次配光技术  
抗 UV PC 灯罩  
整体密封结构

### Product description:

whole body Die cast aluminum housing  
Double photometric diffuser technology  
UV-stop PC lamp cover  
Sealed lamp housing

### 灯具尺寸 Product Dimensions(mm)





### 配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6101(16)	30W	16	3450	12.5/11(kgs)	570x570x570mm	
YMLED-6101(20)	40W	20	4600	12.5/11(kgs)	570x570x570mm	160PCS/20'GP
YMLED-6101(24)	55W	24	6325	12.5/11(kgs)	570x570x570mm	320PCS/40'HQ
YMLED-6101(28)	60W	28	6900	12.5/11(kgs)	570x570x570mm	
YMLED-6101(32)	70W	32	8050	12.5/11(kgs)	570x570x570mm	





### 配光曲线 Polar Diagram



#### Type1

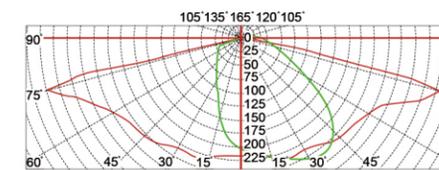

#### Type2

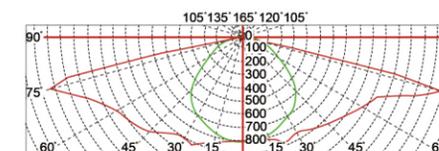

#### Type3

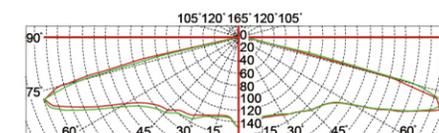

参考颜色 Reference color : RAL 7015  RAL 9005




### 产品说明 :

铝压铸外壳, 铝板旋压顶盖  
二次配光技术  
超白钢化玻璃  
整体密封结构

### Product description:

Die cast aluminum housing, Aluminum sheet rotating cover  
Double photometric diffuser technology  
Supper white toughened glass  
Sealed lamp housing

### 灯具尺寸 Product Dimensions(mm)





### 配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6102(16)	30W	16	3690	13.5/11.5(kgs)	610x610x830mm	
YMLED-6102(20)	40W	20	4920	13.5/11.5(kgs)	610x610x830mm	54PCS/20'GP
YMLED-6102(24)	55W	24	5830	13.5/11.5(kgs)	610x610x830mm	171PCS/40'HQ
YMLED-6102(28)	60W	28	6360	13.5/11.5(kgs)	610x610x830mm	
YMLED-6102(32)	70W	32	8610	13.5/11.5(kgs)	610x610x830mm	





### 配光曲线 Polar Diagram



#### Type1

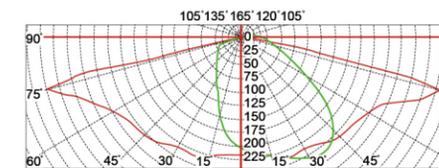

#### Type2

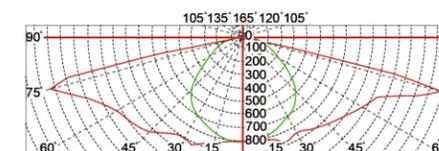

#### Type3

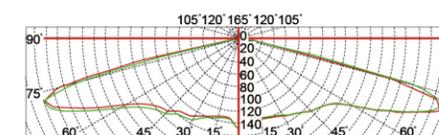


参考颜色 Reference color : RAL 9005  RAL 7015



**产品说明 :**  
 铝压铸外壳, 铝板旋压顶盖  
 二次配光技术  
 抗 UV PC 灯罩  
 整体密封结构

**Product description:**  
 Die cast aluminum housing, Aluminum sheet rotating cover  
 Double photometric diffuser technology  
 UV-stop PC lamp cover  
 Sealed lamp housing

灯具尺寸 Product Dimensions(mm)





配置数据 / Configuration Data:



产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6109(16)	30W	16	3180	13.5/11.5(kgs)	655x655x760mm	
YMLED-6109(20)	40W	20	4240	13.5/11.5(kgs)	655x655x760mm	72PCS/20'GP
YMLED-6109(24)	55W	24	5830	13.5/11.5(kgs)	655x655x760mm	162PCS/40'HQ
YMLED-6109(28)	60W	28	6360	13.5/11.5(kgs)	655x655x760mm	
YMLED-6109(32)	70W	32	7420	13.5/11.5(kgs)	655x655x760mm	

配光曲线 Polar Diagram



Type1

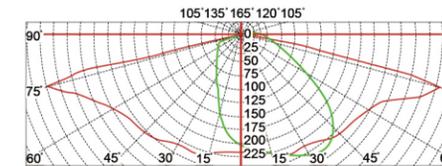

Type2

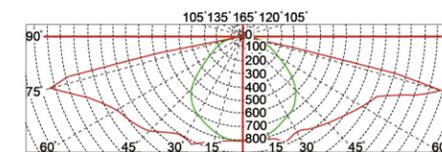

Type3

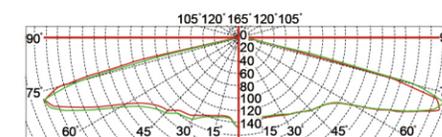


参考颜色 Reference color : RAL 9005  RAL 7015



产品说明：  
 铝压铸外壳，铝板旋压顶盖  
 二次配光技术  
 抗 UV PC 灯罩  
 整体密封结构

Product description:  
 Die cast aluminum housing, Aluminum sheet rotating cover  
 Double photometric diffuser technology  
 UV-stop PC lamp cover  
 Sealed lamp housing

灯具尺寸 Product Dimensions(mm)





配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W./N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6135(16)	30W	16	3600	11.5/9.2(kgs)	605x605x750mm	
YMLED-6135(20)	40W	20	4800	11.5/9.2(kgs)	605x605x750mm	81PCS/20'GP
YMLED-6135(24)	55W	24	6600	11.5/9.2(kgs)	605x605x750mm	171PCS/40'HQ
YMLED-6135(28)	60W	28	7200	11.5/9.2(kgs)	605x605x750mm	
YMLED-6135(32)	70W	32	8400	11.5/9.2(kgs)	605x605x750mm	





配光曲线 Polar Diagram



Type1

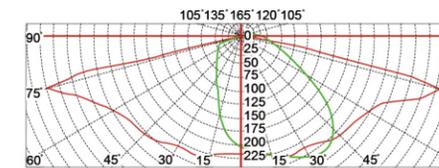

Type2

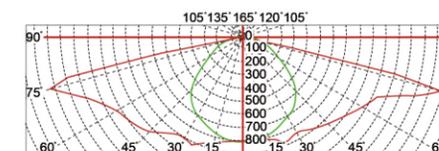

Type3

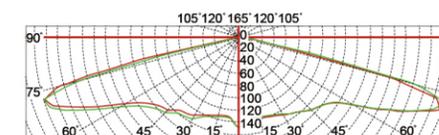


参考颜色 Reference color : RAL 9005  RAL 7015



**产品说明：**  
 铝压铸外壳，铝板旋压顶盖  
 二次配光技术  
 抗 UV PC 灯罩  
 整体密封结构

**Product description:**  
 Die cast aluminum housing, Aluminum sheet rotating cover  
 Double photometric diffuser technology  
 UV-stop PC lamp cover  
 Sealed lamp housing

灯具尺寸 Product Dimensions(mm)





配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W./N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6135B(16)	30W	16	3600	11.5/9.2(kgs)	605x605x750mm	
YMLED-6135B(20)	40W	20	4800	11.5/9.2(kgs)	605x605x750mm	81PCS/20'GP
YMLED-6135B(24)	55W	24	6600	11.5/9.2(kgs)	605x605x750mm	171PCS/40'HQ
YMLED-6135B(28)	60W	28	7200	11.5/9.2(kgs)	605x605x750mm	
YMLED-6135B(32)	70W	32	8400	11.5/9.2(kgs)	605x605x750mm	





配光曲线 Polar Diagram




Type1

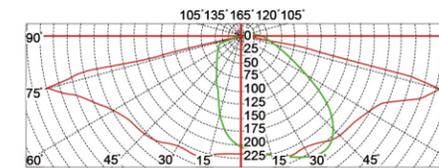

Type2

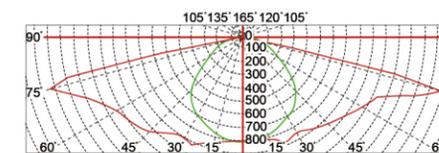

Type3

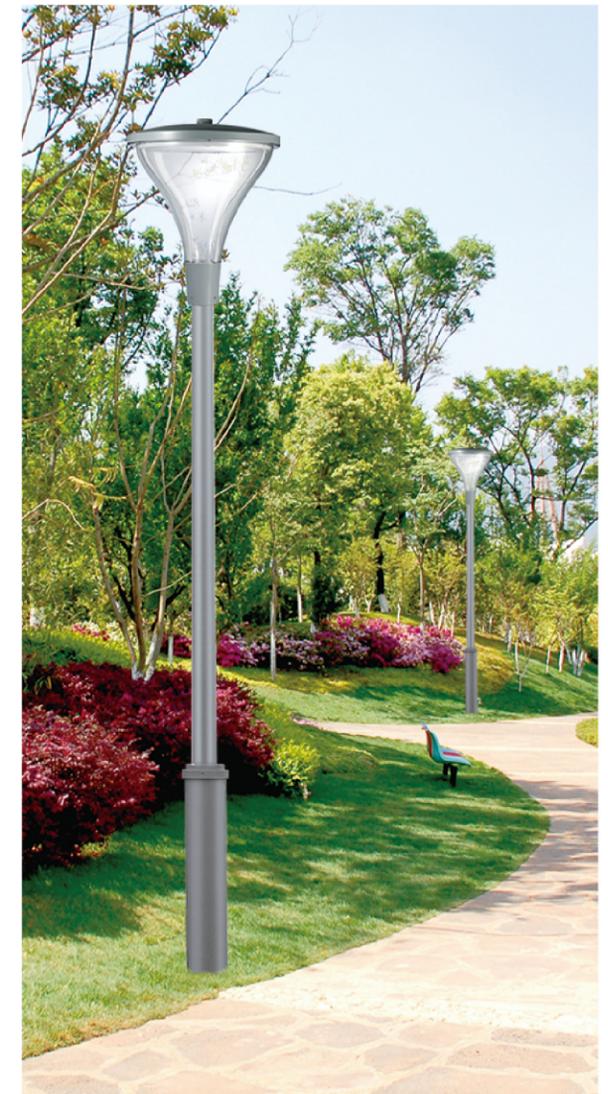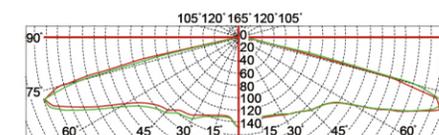

参考颜色 Reference color : RAL 9005  RAL 7015




**产品说明：**

- 整体铝压铸外壳
- 二次配光技术
- 高钢化玻璃
- 模组独立密封结构

**Product description:**

- Whole body Aluminum die-casting housing
- Double photometric diffuser technology
- High-Transparency Tempered Glass
- Modular Independent Sealing Structure

**灯具尺寸 Product Dimensions(mm)**


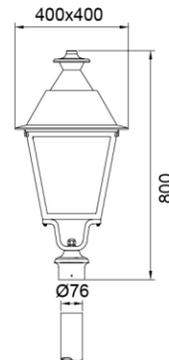


**配置数据 /Configuration Data:**



产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLEd-6136A(16)	30W	16	3600	8.1/6.7 ( kgs )	440X440X820mm	130PCS/20'GP
YMLEd-6136A(20)	40W	20	4800	8.1/6.7 ( kgs )	440X440X820mm	420PCS/40'GP
YMLEd-6136A(24)	55W	24	6490	8.1/6.7 ( kgs )	440X440X820mm	

**配光曲线 Polar Diagram**



Type1

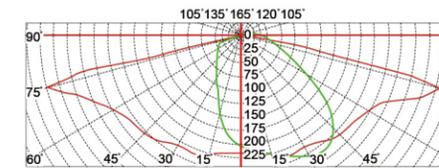

Type2

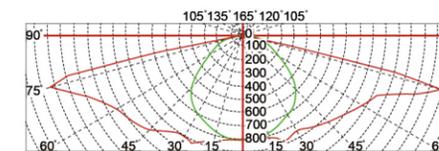

Type3

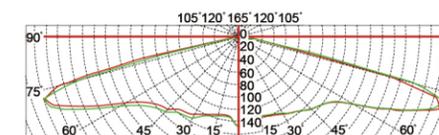

参考颜色 Reference color : RAL 9005  RAL 7015




**产品说明：**

- 整体铝压铸外壳
- 二次配光技术
- 高钢化玻璃
- 模组独立密封结构

**Product description:**

- Whole body Aluminum die-casting housing
- Double photometric diffuser technology
- High-Transparency Tempered Glass
- Modular Independent Sealing Structure

**灯具尺寸 Product Dimensions(mm)**


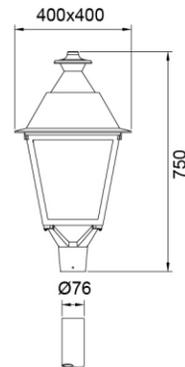


**配置数据 /Configuration Data:**



产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W./N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLEd-6136B(16)	30W	16	3600	8.1/6.7 ( kgs )	440X440X770mm	130PCS/20'GP 420PCS/40'GP
YMLEd-6136B(20)	40W	20	4800	8.1/6.7 ( kgs )	440X440X770mm	
YMLEd-6136B(24)	55W	24	6490	8.1/6.7 ( kgs )	440X440X770mm	

**配光曲线 Polar Diagram**



Type1

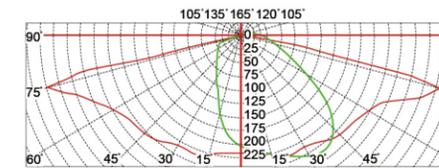

Type2

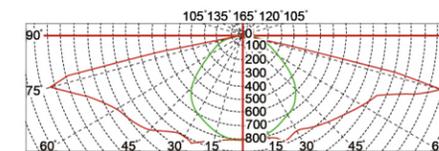

Type3

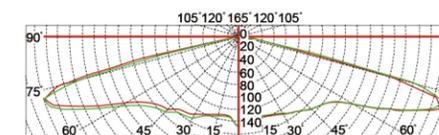

参考颜色 Reference color : RAL 9005  RAL 7015




**产品说明：**

- 整体铝压铸外壳
- 二次配光技术
- 高钢化玻璃
- 模组独立密封结构

**Product description:**

- Whole body Aluminum die-casting housing
- Double photometric diffuser technology
- High-Transparency Tempered Glass
- Modular Independent Sealing Structure

**灯具尺寸 Product Dimensions(mm)**


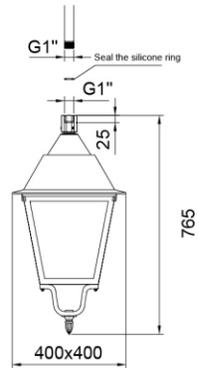


**配置数据 /Configuration Data:**



产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6136C(16)	30W	16	3600	8.1/6.7 ( kgs )	440X440X770mm	130PCS/20'GP
YMLED-6136C(20)	40W	20	4800	8.1/6.7 ( kgs )	440X440X770mm	420PCS/40'GP
YMLED-6136C(24)	55W	24	6490	8.1/6.7 ( kgs )	440X440X770mm	

**配光曲线 Polar Diagram**



Type1

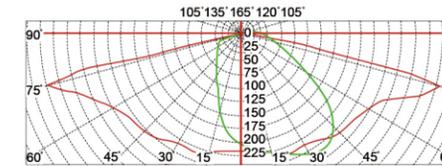

Type2

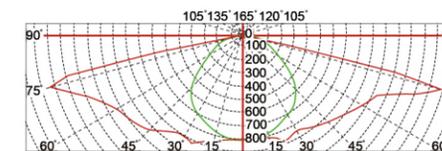

Type3



参考颜色 Reference color : RAL 9005 ■ RAL 7015 ■




### 产品说明：

- 整体铝压铸外壳
- 二次配光技术
- 模组独立密封结构
- 可配拨码器，色温功率 3 档可调

### Product description:

- Whole body Aluminum die-casting housing
- Double photometric diffuser technology
- Modular Independent Sealing Structure
- With dip switch, 3-level adjustable CCT and power

### 灯具尺寸 Product Dimensions(mm)





### 配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W./N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLEd-6136M	30W	48	3900	5/4.5 ( kgs )	345X345X430mm	510PCS/20'GP
YMLEd-6136M	45W	48	5850	5/4.5 ( kgs )	345X345X430mm	1020PCS/40'HQ
YMLEd-6136M	60W	48	7800	5/4.5 ( kgs )	345X345X430mm	





### 配光曲线 Polar Diagram



Type1

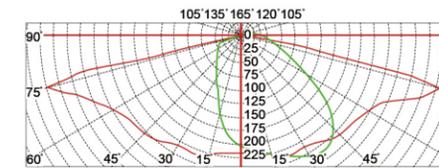

Type2

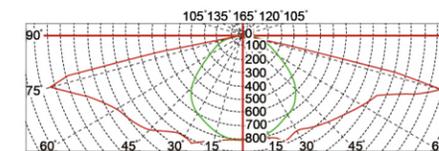

Type3

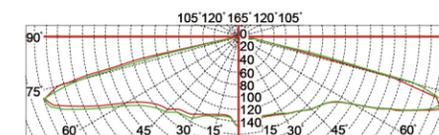

参考颜色 Reference color : RAL 9005 ■ RAL 7015 ■




**产品说明：**

- 整体铝压铸外壳
- 二次配光技术
- 超白钢化玻璃
- 模组独立密封结构

**Product description:**

- whole body Die cast aluminum housing
- Double photometric diffuser technology
- Supper white toughened glass
- Individual and sealed module

**灯具尺寸 Product Dimensions(mm)**


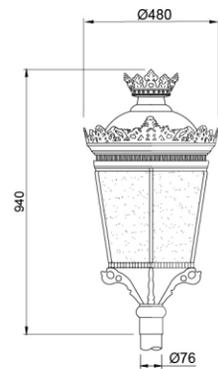


**配置数据 /Configuration Data:**



产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLEd-6125(16)	30W	16	3150	10.4/12(kgs)	490x490x905mm	88PCS/20'GP
YMLEd-6125(20)	40W	20	4200	10.4/12(kgs)	490x490x905mm	240PCS/40'HQ
YMLEd-6125(24)	55W	24	5775	10.4/12(kgs)	490x490x905mm	

**配光曲线 Polar Diagram**



Type1

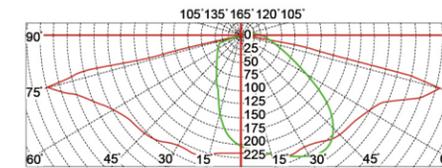

Type2

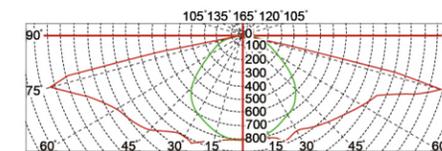

Type3




参考颜色 Reference color : RAL 9005  RAL 7015



产品说明：  
整体铝压铸外壳  
二次配光技术  
抗 UV PC 灯罩  
整体密封结构

Product description:  
whole body Die cast aluminum housing  
Double photometric diffuser technology  
UV-stop PC lamp cover  
Sealed lamp housing

灯具尺寸 Product Dimensions(mm)





配置数据 / Configuration Data:



产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W./N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6128(16)	30W	16	3810	6.5/5.5(kgs)	530X530X530mm	180PCS/20'GP
YMLED-6128(20)	40W	20	5080	6.5/5.5(kgs)	530X530X530mm	480PCS/40'HQ
YMLED-6128(24)	55W	24	6985	6.5/5.5(kgs)	530X530X530mm	

配光曲线 Polar Diagram




Type1

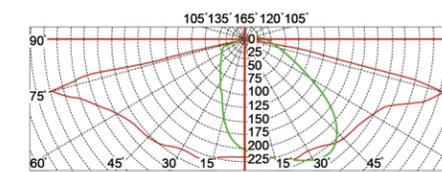

Type2

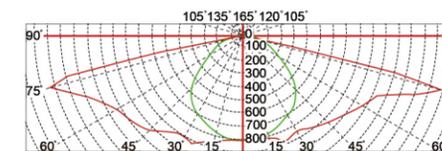

Type3

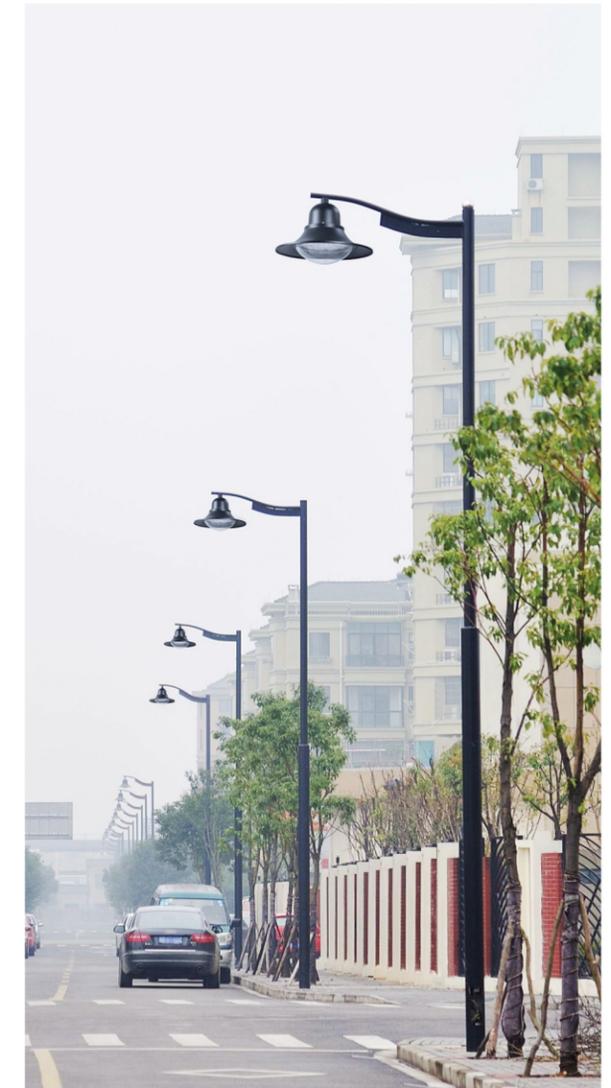

参考颜色 Reference color : RAL 9005  RAL 7015




**产品说明：**

- 整体铝压铸外壳
- 二次配光技术
- 整体密封结构
- 配 NEMA 接口

**Product description:**

- whole body Die cast aluminum housing
- Double photometric diffuser technology
- Sealed lamp housing
- Equipped with NEMA socket


**灯具尺寸 Product Dimensions(mm)**



**配置数据 /Configuration Data:**

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6128B(16)	30W	16	3810	7/6(kgs)	570x570x390mm	180PCS/20'GP
YMLED-6128B(20)	40W	20	5080	7/6(kgs)	570x570x390mm	480PCS/40'HQ
YMLED-6128B(24)	55W	24	6985	7/6(kgs)	570x570x390mm	

**配光曲线 Polar Diagram**

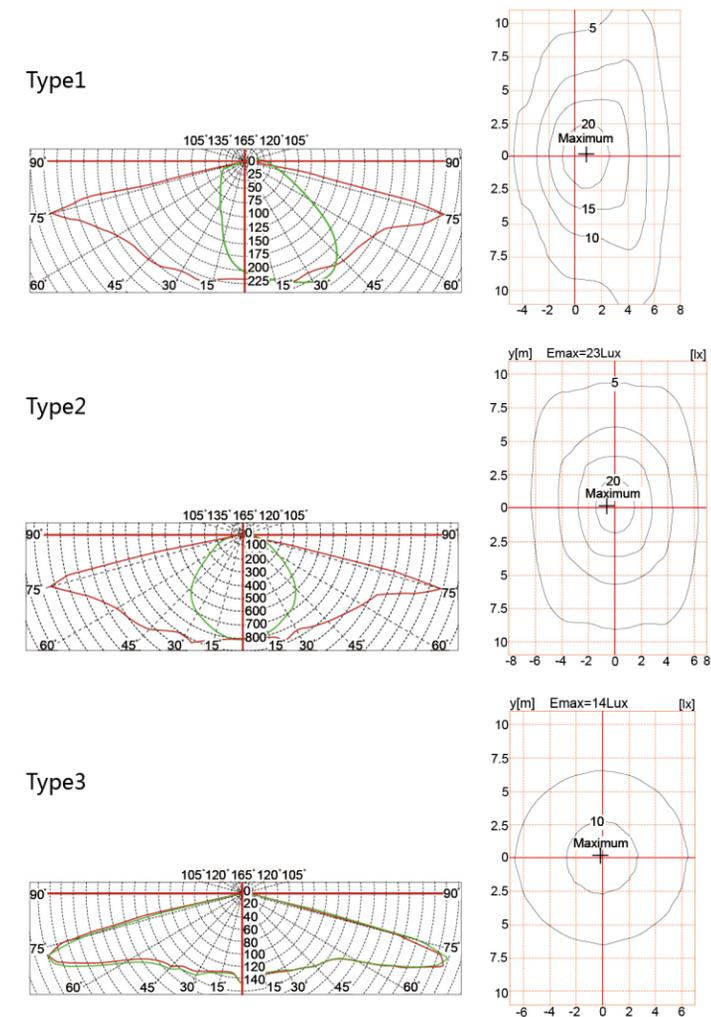

参考颜色 Reference color : RAL 9005 ■ RAL 7015 ■




### 产品说明：

铝压铸灯具外壳，铝拉制灯杆  
光学级 PMMA 灯罩  
整体密封结构  
二次配光技术

### Product description:

Aluminum die-casting housing  
Optical grade PMMA lamp shades  
Sealed lamp housing  
Double photometric diffuser technology

### 灯具尺寸 Product Dimensions(mm)

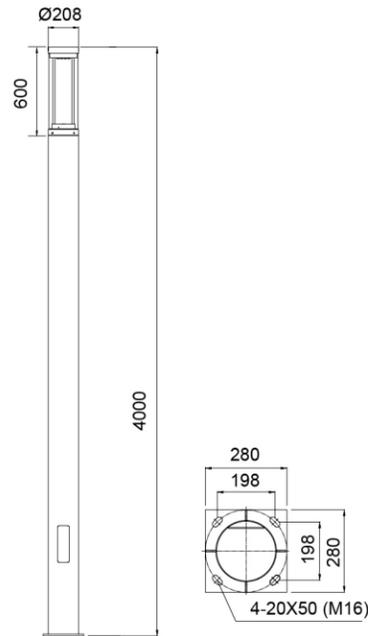



### 配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W./N.W	包装尺寸 Packing Size
YMLED-6308(12)	20W	12	2320	28/24.5(kgs)	630x265x265mm 1PCS/CTN
YMLED-6308(16)	30W	16	3480		
YMLED-6308(20)	40W	20	4640		
YMLED-6308(24)	55W	24	6380		





### 配光曲线 Polar Diagram



#### Type1

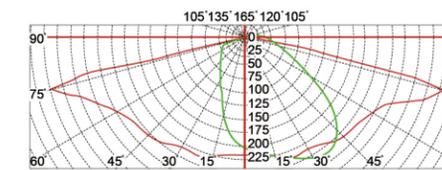

#### Type2

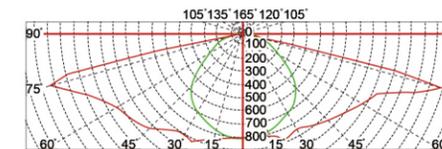

#### Type3



参考颜色 Reference color : RAL 9005  RAL 7015




### 产品说明：

铝压铸灯具外壳，铝拉制灯杆  
 光学级 PMMA 灯罩  
 整体密封结构  
 二次配光技术

### Product description:

Die cast aluminum housing, Drawn aluminum rod  
 Optical grade PMMA lamp shades  
 Sealed lamp housing  
 Double photometric diffuser technology

### 灯具尺寸 Product Dimensions(mm)

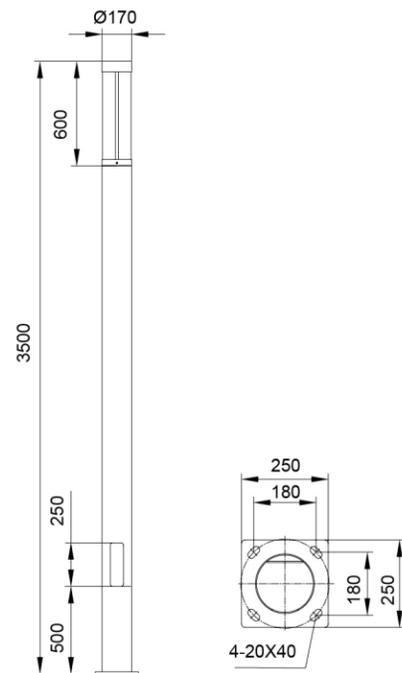



### 配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size
YMLED-6308B	26W	16	3100	20/19(kgs)	175x175x800mm
YMLED-6308B	38W	16	4295		175x175x2900mm





### 配光曲线 Polar Diagram



#### Type1

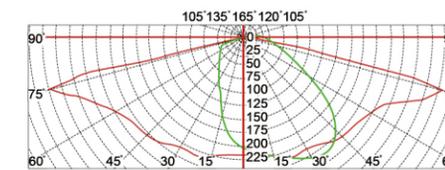

#### Type2

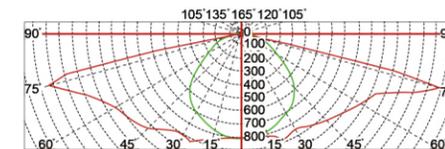

#### Type3




参考颜色 Reference color : RAL 9005 ■ RAL 7015 ■ RAL 9006 ■



产品说明：  
 铝压铸外壳，拉制铝杆  
 光学级 PMMA 灯罩  
 整体密封结构  
 224PCS 2835 SMT 工艺  
 透光均匀

Product description:  
 Die cast aluminum housing, Drawn aluminum rod  
 Optical grade PMMA lamp shades  
 Sealed lamp housing  
 224PCS 2835 SMT process  
 Even light transmission

灯具尺寸 Product Dimensions(mm)

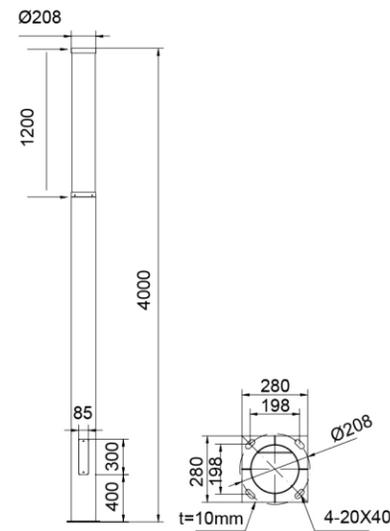


配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size
YMLED-6309	50W	224	5050	27/23(kgs)	1210x265x265mm 1PCS/CTN
YMLED-6309	80W	224	6600		2850x550x300mm 2PCS/CTN



配光曲线 Polar Diagram

Type1

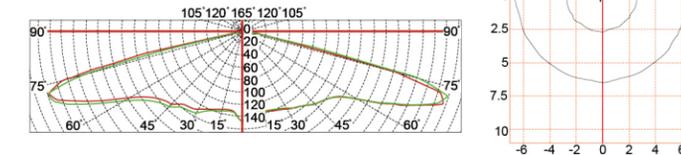

参考颜色 Reference color : RAL 9005  RAL 7015




### 产品说明：

铝压铸外壳，拉制铝杆  
光学级 PMMA 灯罩  
整体密封结构  
224PCS 2835 SMT 工艺  
透光均匀

### Product description:

Die cast aluminum housing, Drawn aluminum rod  
Optical grade PMMA lamp shades  
Sealed lamp housing  
224PCS 2835 SMT process  
Even light transmission

### 灯具尺寸 Product Dimensions(mm)

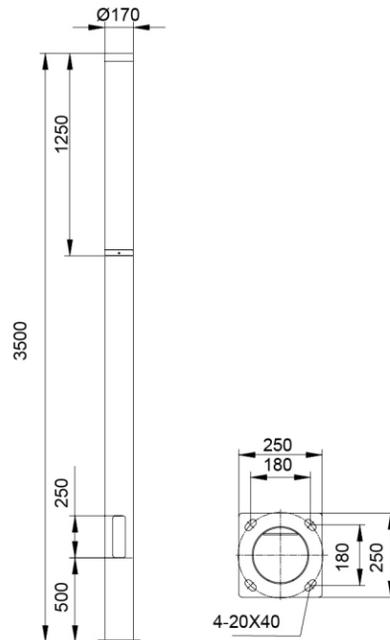


### 配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size
YMLED-6309B	45W	224	5175	19.5/18(kgs)	175x175x1400mm
YMLED-6309B	60W	224	6300		175x175x2300mm



### 配光曲线 Polar Diagram

#### Type3

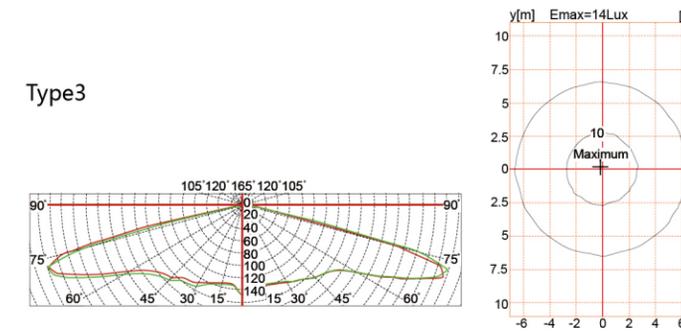

参考颜色 Reference color : RAL 9005 ■ RAL 7015 ■ RAL 9006 ■




### 产品说明：

铝压铸灯具外壳，铝拉制灯杆  
光学级 PMMA 灯罩  
整体密封结构  
二次配光技术

### Product description:

Aluminum die-casting housing  
Optical grade PMMA lamp shades  
Sealed lamp housing  
Double photometric diffuser technology

### 灯具尺寸 Product Dimensions(mm)

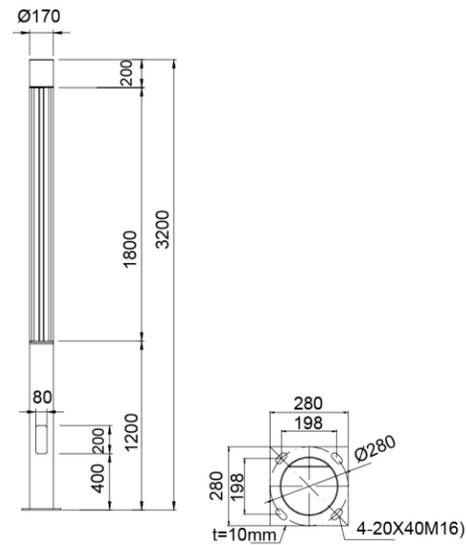



### 配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W./N.W	包装尺寸 Packing Size
YMLED-6310(20)	20W	20	2320	18/14(kgs)	2020x180x180mm 1PCS/CTN
YMLED-6310(30)	30W	30	3480		1250x550x300mm 2PCS/CTN





### 配光曲线 Polar Diagram



#### Type1

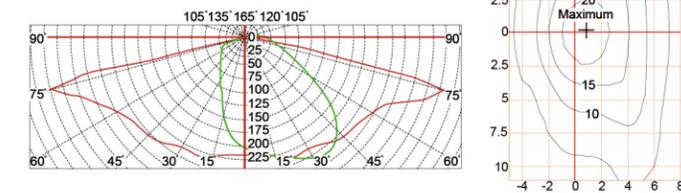

#### Type2

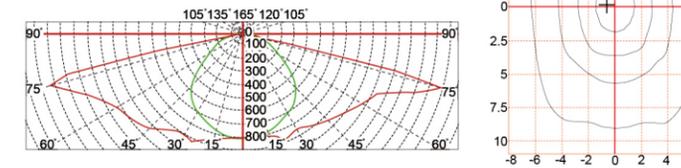

#### Type3

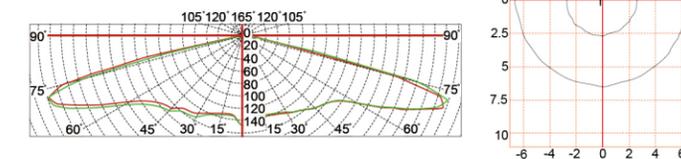

参考颜色 Reference color : RAL 9005 ■ RAL 7015 ■



YMLED-6311B


**产品说明：**

铝压铸灯具外壳，铝拉制灯杆  
二次配光技术  
超白钢化玻璃  
模组独立密封结构

**Product description:**



Die cast aluminum housing, Drawn aluminum rod  
Double photometric diffuser technology  
Supper white toughened glass  
Individual and sealed module

**灯具尺寸 Product Dimensions(mm)**


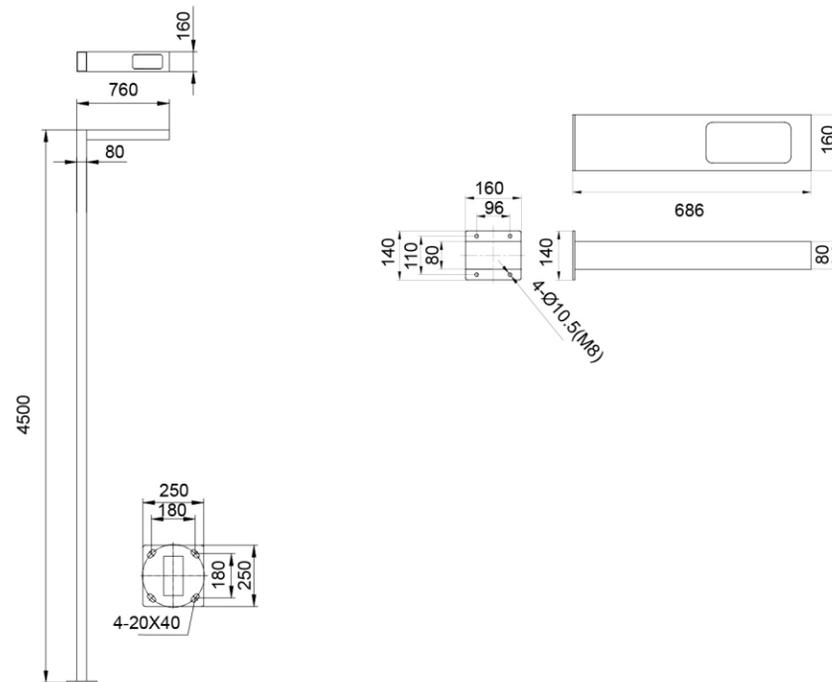


**配光曲线 Polar Diagram**



Type1

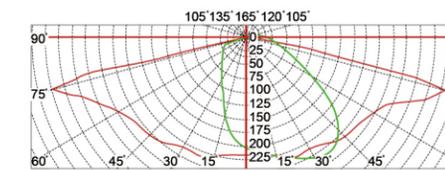

Type2

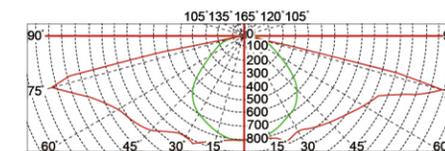

Type3

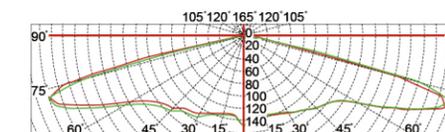

参考颜色 Reference color : RAL 9005 ■ RAL 7015 ■ RAL 9006 ■

**配置数据 /Configuration Data:**

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size
YMLED-6311	38W	32	5016		175x95x650mm
YMLED-6311	55W	32	7150	28/26(kgs)	175x95x4450mm
YMLED-6311	75W	32	9600		

# YMLED-6307



**产品说明：**

铝压铸灯具外壳，铝拉制灯杆。  
光学级 PMMA 透光罩。  
氧化铝防眩光反光器。  
大功率 LED 结合扩散板有效消除眩光。

**Product description:**

Aluminum die-casting housing.  
Photogy PMMA Diffuser.  
Anti-glare aluminum oxide reflector.  
High power LED with anti-glare diffuser plate.


**技术数据：**

防护等级：IP65  
外壳防护等级：2 类  
环境温 -35°C~ +45°C  
电器绝缘等级：1  
输入电压：170-220V 50-60Hz  
推荐高度：2.8m  
功率：30W

**Technology Data:**

Protection grade:IP65  
Corrosion-proof capability:II  
Working condition:-35°C~ +45°C  
Isolation class:1  
Power voltage:170-220V 50-60Hz  
High:2.8m  
Max power:30W

**灯具尺寸 Product Dimensions(mm)**

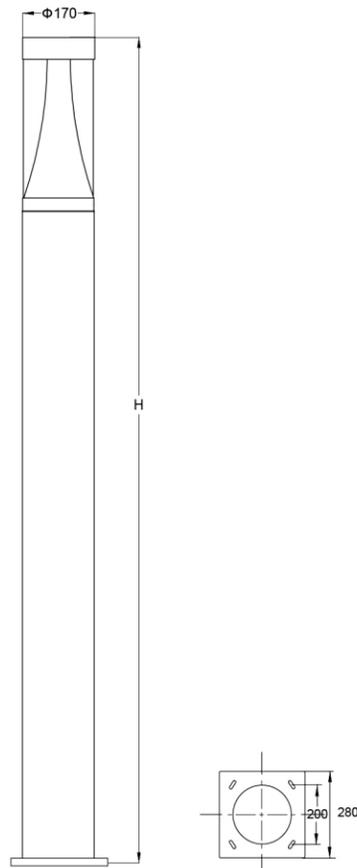

# YM-6605



**产品说明：**

- 外壳：铝压铸灯具外壳，表面静电粉末喷涂处理。
- 透光器：抗紫外线 PC。
- 密封器：采用硅橡胶密封器。
- 防护等级：IP54
- 电源电压：220V(±10%)/50Hz
- 灯脚类型：E27 或 COB
- 最大功率：14W
- 电器绝缘等级：class1

# YM-6606



**Product description:**

- Lamp housing is made by die cast aluminum, surface treatment for electrostatic powder coating.
- Diffuser is made by high quality UV-stop PC lens.
- Heat resisting silicone rubber gasket.
- Protection grade:IP54
- Power voltage:220V(±10%)/50Hz
- Lamp holder:E27/COB
- Max power:14W
- Isolation class:class1

# YM-6607






产品说明：  
 铝压铸外壳  
 钢化玻璃面罩  
 整体密封结构  
 二次配光技术  
 配 NEMA 接口

Product description:  
 Die cast aluminum housing  
 Tempered glass mask  
 Sealed lamp housing  
 Double photometric diffuser technology  
 Equipped with NEMA socket

灯具尺寸 Product Dimensions(mm)

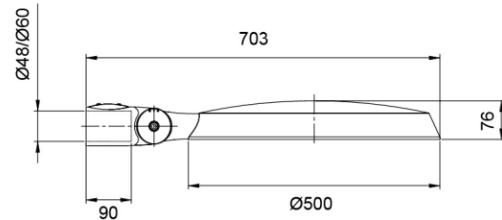



### 配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6409 ( 16 )	30W	16	3900	9.5/7.9(kgs)	660x560x130mm	
YMLED-6409 ( 20 )	40W	20	5200	9.5/7.9(kgs)	660x560x130mm	
YMLED-6409 ( 24 )	55W	24	7150	9.5/7.9(kgs)	660x560x130mm	
YMLED-6409 ( 28 )	60W	28	7800	9.5/7.9(kgs)	660x560x130mm	544PCS/20'GP
YMLED-6409 ( 32 )	70W	32	9100	9.5/7.9(kgs)	660x560x130mm	
YMLED-6409 ( 36 )	80W	36	10400	9.5/7.9(kgs)	660x560x130mm	1360PCS/40'HQ
YMLED-6409 ( 40 )	90W	40	11700	9.5/7.9(kgs)	660x560x130mm	
YMLED-6409 ( 44 )	100W	44	13000	9.5/7.9(kgs)	660x560x130mm	
YMLED-6409 ( 48 )	105W	48	13650	9.5/7.9(kgs)	660x560x130mm	





### 配光曲线 Polar Diagram



Type1

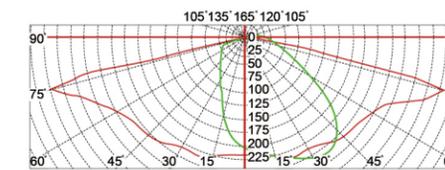

Type2

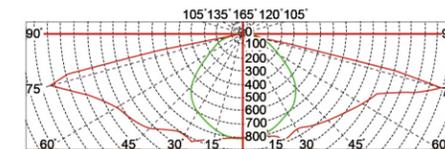

Type3




参考颜色 Reference color : RAL 9005  RAL 7015



产品说明：  
 铝压铸外壳  
 钢化玻璃面罩  
 整体密封结构  
 二次配光技术  
 配 NEMA 接口

Product description:  
 Die cast aluminum housing  
 Tempered glass mask  
 Sealed lamp housing  
 Double photometric diffuser technology  
 Equipped with NEMA socket

灯具尺寸 Product Dimensions(mm)

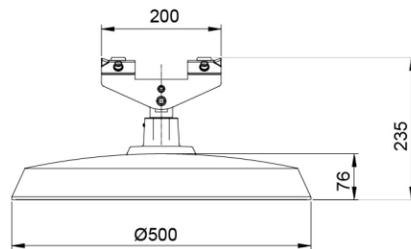



### 配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power	LED 颗数 LED Qty	初始光通量 Luminous Flux	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
YMLED-6410 ( 16 )	30W	16	3900	10/8.5(kgs)	560x560x290mm	
YMLED-6410 ( 20 )	40W	20	5200	10/8.5(kgs)	560x560x290mm	
YMLED-6410 ( 24 )	55W	24	7150	10/8.5(kgs)	560x560x290mm	
YMLED-6410 ( 28 )	60W	28	7800	10/8.5(kgs)	560x560x290mm	280PCS/20'GP
YMLED-6410 ( 32 )	70W	32	9100	10/8.5(kgs)	560x560x290mm	
YMLED-6410 ( 36 )	80W	36	10400	10/8.5(kgs)	560x560x290mm	756PCS/40'HQ
YMLED-6410 ( 40 )	90W	40	11700	10/8.5(kgs)	560x560x290mm	
YMLED-6410 ( 44 )	100W	44	13000	10/8.5(kgs)	560x560x290mm	
YMLED-6410 ( 48 )	105W	48	13650	10/8.5(kgs)	560x560x290mm	





### 配光曲线 Polar Diagram



Type1

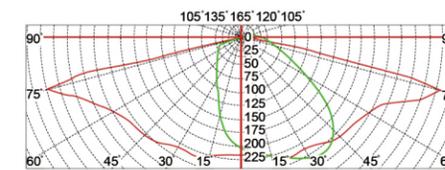

Type2

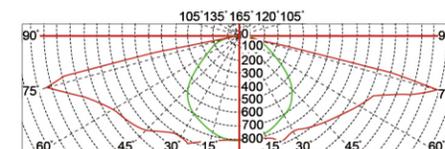

Type3



## Galaxy max





### 产品说明：

- 铝压铸外壳
- 垂直和水平两种安装方式
- 无需工具打开和安装电器板
- 2次配光设计
- 钢化玻璃面罩
- 带 10kV 防雷器
- 通过所有 CE 认证
- 配 NEMA 接口

### Product description:

- Die cast Aluminum housing
- Vertical and Horizontal 2 kinds of installation
- Quick and tool free to open and dismantle the gear plate
- Second optical design for different roads
- Tempered glass screen can be clear or frosted glass
- With 10kV SPD inside
- All CE certificates available
- Equipped with NEMA socket

### 灯具尺寸 Product Dimensions(mm)

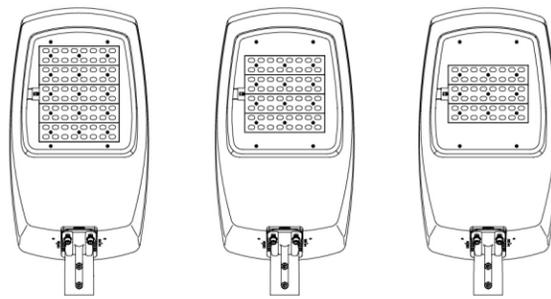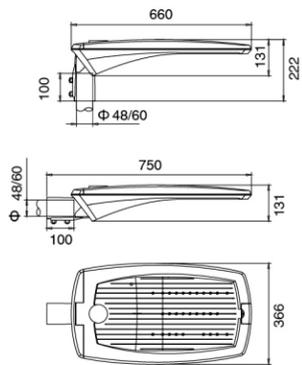

80 LED S



64 LED S

48 LED S

### 配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power (led current 530mA)	初始光通量 Nominal initial FLUX	额定功率 Rated Power (led current 700mA)	初始光通量 Nominal initial FLUX	LED 颗数 LED Qty	毛净重 G.W./N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
Galaxy max(48)	80W	10304lm	104W	12544lm	48	9/10(kgs)	770*400*160MM	588PCS/20'GP
Galaxy max(64)	105W	13440lm	140W	16800lm	64	9/10(kgs)	770*400*160MM	1392PCS/40'HQ
Galaxy max(80)	135W	17024lm	180W	21056lm	80	9/10(kgs)	770*400*160MM	

### 配光曲线 Polar Diagram

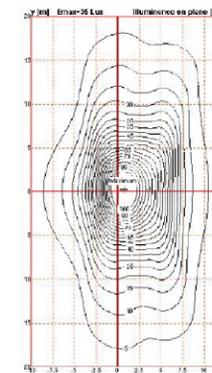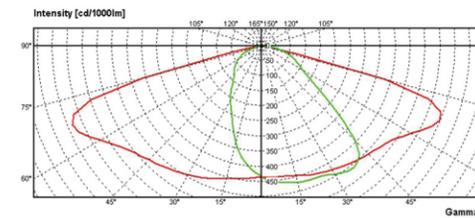

# YMLED-6408M


## Galaxy mini



**产品说明：**  
 铝压铸外壳  
 垂直和水平两种安装方式  
 无需工具打开和安装电器板  
 2次配光设计  
 钢化玻璃面罩  
 带 10kV 防雷器  
 通过所有 CE 认证  
 配 NEMA 接口

**Product description:**  
 Die cast Aluminum housing  
 Vertical and Horizontal 2 kinds of installation  
 Quick and tool free to open and dismantle the gear plate  
 Second optical design for different roads  
 Tempered glass screen can be clear or frosted glass  
 With 10kV SPD inside  
 All CE certificates available  
 Equipped with NEMA socket

### 灯具尺寸 Product Dimensions(mm)

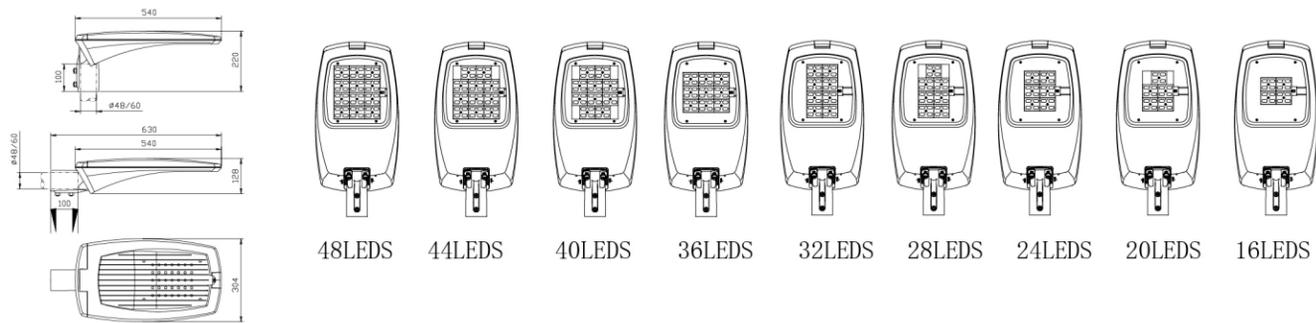



### 配置数据 /Configuration Data:

产品型号 Product Code	额定功率 Rated Power (led current 530mA)	初始光通量 Nominal initial FLUX	额定功率 Rated Power (led current 700mA)	初始光通量 Nominal initial FLUX	LED 颗数 LED Qty	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
Galaxy mini(16)	26W	3360lm	35W	4256lm	16	6/7(kgs)	655*330*160MM	
Galaxy mini(20)	33W	4144lm	42W	5040lm	20	6/7(kgs)	655*330*160MM	
Galaxy mini(24)	40W	4600lm	52W	6272lm	24	6/7(kgs)	655*330*160MM	
Galaxy mini(28)	46W	5152lm	60W	7280lm	28	6/7(kgs)	655*330*160MM	784PCS/20'GP
Galaxy mini(32)	52W	6720lm	67W	8064lm	32	6/7(kgs)	655*330*160MM	2016PCS/40'HQ
Galaxy mini(36)	60W	7728lm	75W	9072lm	36	6/7(kgs)	655*330*160MM	
Galaxy mini(40)	66W	8512lm	86W	10304lm	40	6/7(kgs)	655*330*160MM	
Galaxy mini(44)	71W	9296lm	95W	11424lm	44	6/7(kgs)	655*330*160MM	
Galaxy mini(48)	80W	10080lm	104W	12544lm	48	6/7(kgs)	655*330*160MM	

# Street Lighting / 路灯



### 配光曲线 Polar Diagram

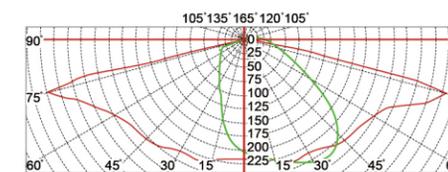

## Galaxy micro




### 产品说明：

- 铝压铸外壳
- 垂直和水平两种安装方式
- 无需工具打开和安装电路板
- 2次配光设计
- 钢化玻璃面罩
- 带 10kV 防雷器
- 通过所有 CE 认证
- 配 NEMA 接口

### Product description:

- Die cast Aluminum housing
- Vertical and Horizontal 2 kinds of installation
- Quick and tool free to open and dismantle the gear plate
- Second optical design for different roads
- Tempered glass screen can be clear or frosted glass
- With 10kV SPD inside
- All CE certificates available
- Equipped with NEMA socket



### 灯具尺寸 Product Dimensions(mm)

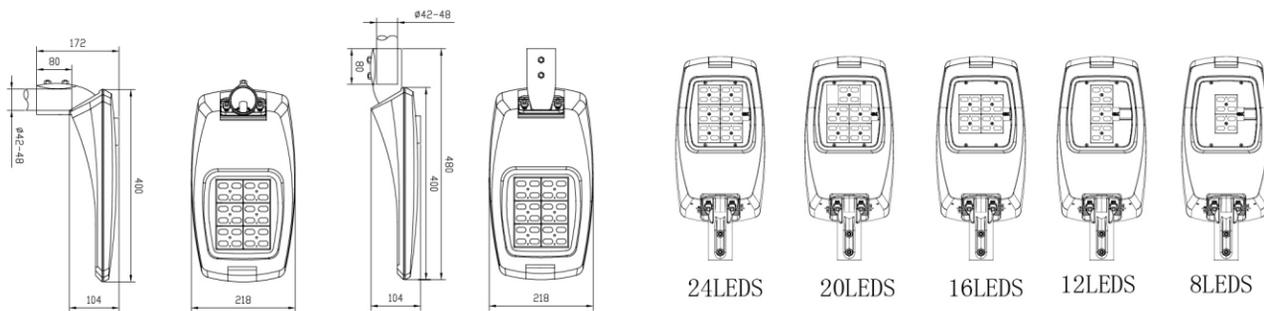

### 配置数据 / Configuration Data:

产品型号 Product Code	额定功率 Rated Power (led current 530mA)	初始光通量 Nominal initial FLUX	额定功率 Rated Power (led current 700mA)	初始光通量 Nominal initial FLUX	LED 颗数 LED Qty	毛净重 G.W/N.W	包装尺寸 Packing Size	装柜数量 Loading Qty
Galaxy micro(8)	13W	1674lm	18W	2170lm	8	4/5(kgs)	525*240*140MM	
Galaxy micro(12)	20W	2576lm	26W	3136lm	12	4/5(kgs)	525*240*140MM	1472PCS/20'GP
Galaxy micro(16)	26W	3360lm	35W	4256lm	16	4/5(kgs)	525*240*140MM	3724PCS/40'HQ
Galaxy micro(20)	33W	4144lm	42W	5040lm	20	4/5(kgs)	525*240*140MM	
Galaxy micro(24)	40W	5152lm	52W	6272lm	24	4/5(kgs)	525*240*140MM	

### 配光曲线 Polar Diagram

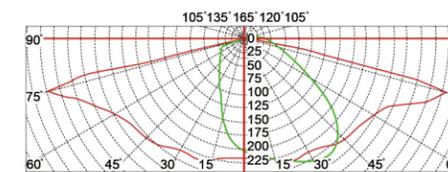



### 产品说明：

微光充电、提高充电效率、对单组电芯均衡充电  
智能运算，检测充电放电比例确保阴雨天亮灯  
智能匹配光源，提高负载效率  
适合于乡村道路，庭院，公园

### Product description:

Low light charging, improved charging efficiency and balanced charge for single battery.  
Intelligent operation, detecting charge discharge ratio to ensure overcast daylight.  
Intelligent matching light source to improve load efficiency  
Suitable for country roads, courtyards, parks




### 配置数据 / Configuration Data:

产品型号 Product Code			
YMLED-6801-20W	20W	60W	30AH
YMLED-6801-30W	30W	80W	40AH
YMLED-6801-40W	40W	100W	50AH

# YMLED-6802



### 灯具尺寸 Product Dimensions(mm)

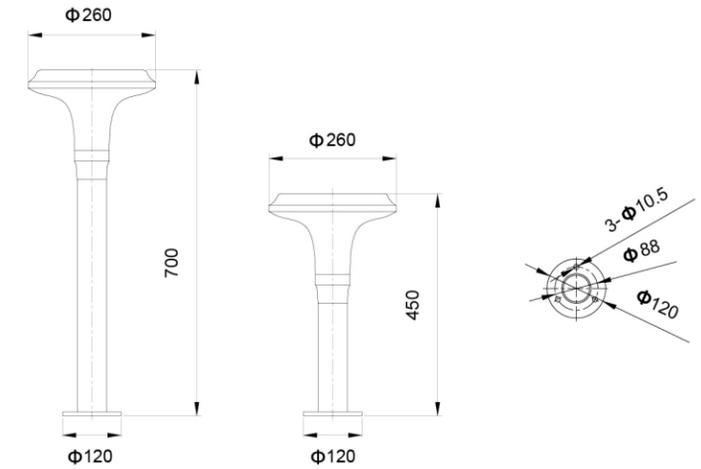

### 产品说明：

压铸铝外壳  
抗 UV PC 灯罩  
整体密封结构  
单晶硅太阳能板  
磷酸铁锂电池

### Product description:

Die cast aluminum housing  
UV-stop PC lamp cover  
Sealed lamp housing  
Single silicon solar panel  
Lithium iron battery with phosphorus

### 配置数据 / Configuration Data:

太阳能板 Solar panel	电池 Battery	色温 CCT	充电时间 Charging time	防水等级 IP Rating	环境温度 Working condition	毛净重 G.W/N.W
5V/25W	3.2V/30AH	3000K/6500K	3~5h	IP65	-20°C / 50°C	7/8.5(kgs)

参考颜色 Reference color : RAL 9005






**产品说明：**

- 压铸铝外壳
- 抗 UV PC 灯罩
- 整体密封结构
- 单晶硅太阳能板
- 磷酸铁锂电池



**Product description:**

- Die cast aluminum housing
- UV-stop PC lamp cover
- Sealed lamp housing
- Single silicon solar panel
- Lithium iron battery with phosphorus

**灯具尺寸 Product Dimensions(mm)**

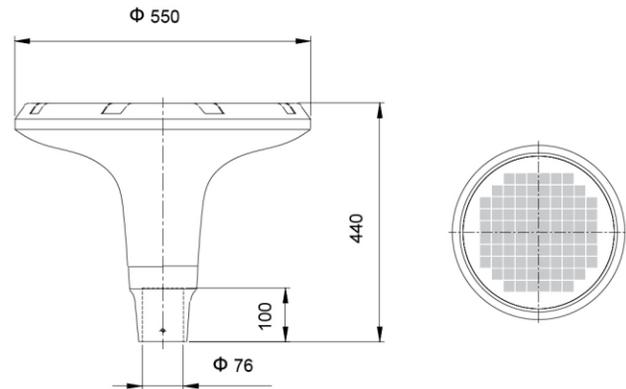

**配光曲线 Polar Diagram**

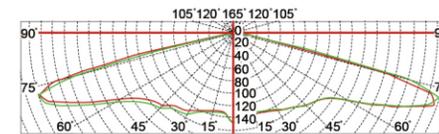

**配置数据 / Configuration Data:**

太阳能板 Solar panel	电池 Battery	色温 CCT	充电时间 Charging time	防水等级 IP Rating	环境温度 Working condition	毛净重 G.W/N.W	包装尺寸 Packing Size
5V/25W	3.2V/30AH	3000K/6500K	3~5h	IP65	-20°C / 50°C	7/8.5(kgs)	540x540x470mm

参考颜色 Reference color : RAL 9005




**产品说明：**

- 压铸铝外壳
- 抗 UV PC 灯罩
- 整体密封结构
- 单晶硅太阳能板
- 磷酸铁锂电池


**Product description:**

- Die cast aluminum housing
- UV-stop PC lamp cover
- Sealed lamp housing
- Single silicon solar panel
- Lithium iron battery with phosphorus

**灯具尺寸 Product Dimensions(mm)**

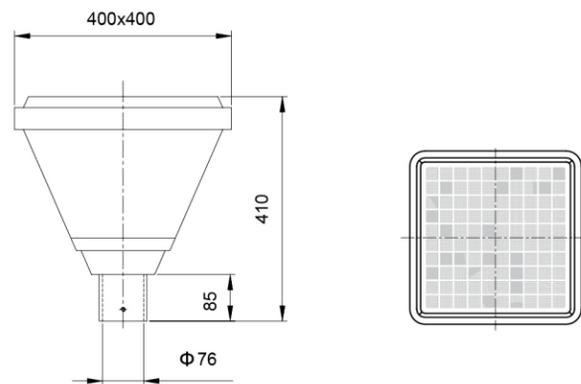

**配光曲线 Polar Diagram**

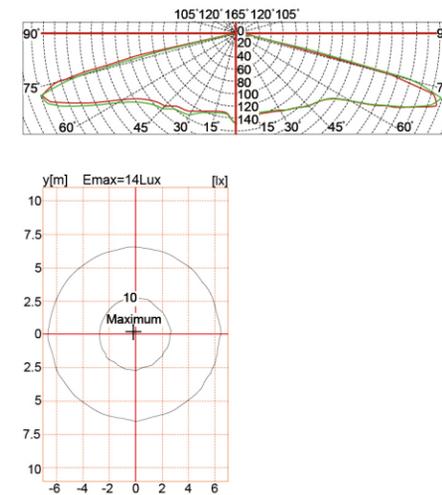

**配置数据 / Configuration Data:**

太阳能板 Solar panel	电池 Battery	色温 CCT	充电时间 Charging time	防水等级 IP Rating	环境温度 Working condition	毛净重 G.W/N.W	包装尺寸 Packing Size
5V/20W	3.2V/20AH	3000K/6500K	3~5h	IP65	-20°C / 50°C	5/6.5(kgs)	410x410x430mm

参考颜色 Reference color : RAL 9005




**产品说明：**

- 压铸铝外壳
- 抗 UV PC 灯罩
- 整体密封结构
- 单晶硅太阳能板
- 磷酸铁锂电池

**Product description:**

- Die cast aluminum housing
- UV-stop PC lamp cover
- Sealed lamp housing
- Single silicon solar panel
- Lithium iron battery with phosphorus

**灯具尺寸 Product Dimensions(mm)**


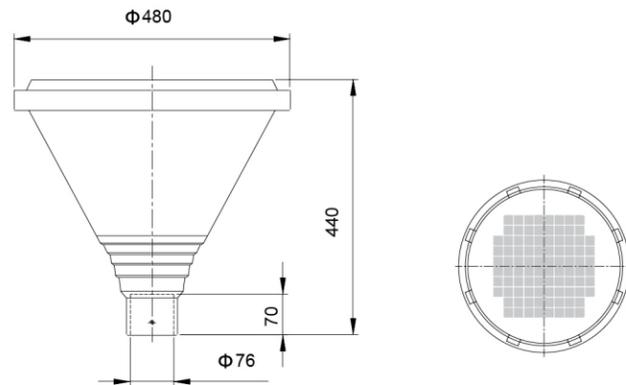


**配置数据 / Configuration Data:**

太阳能板 Solar panel	电池 Battery	色温 CCT	充电时间 Charging time	防水等级 IP Rating	环境温度 Working condition	毛净重 G.W/N.W	包装尺寸 Packing Size
5V/20W	3.2V/20AH	3000K/6500K	3~5h	IP65	-20°C / 50°C	5/6.5(kgs)	495x495x450mm



**配光曲线 Polar Diagram**

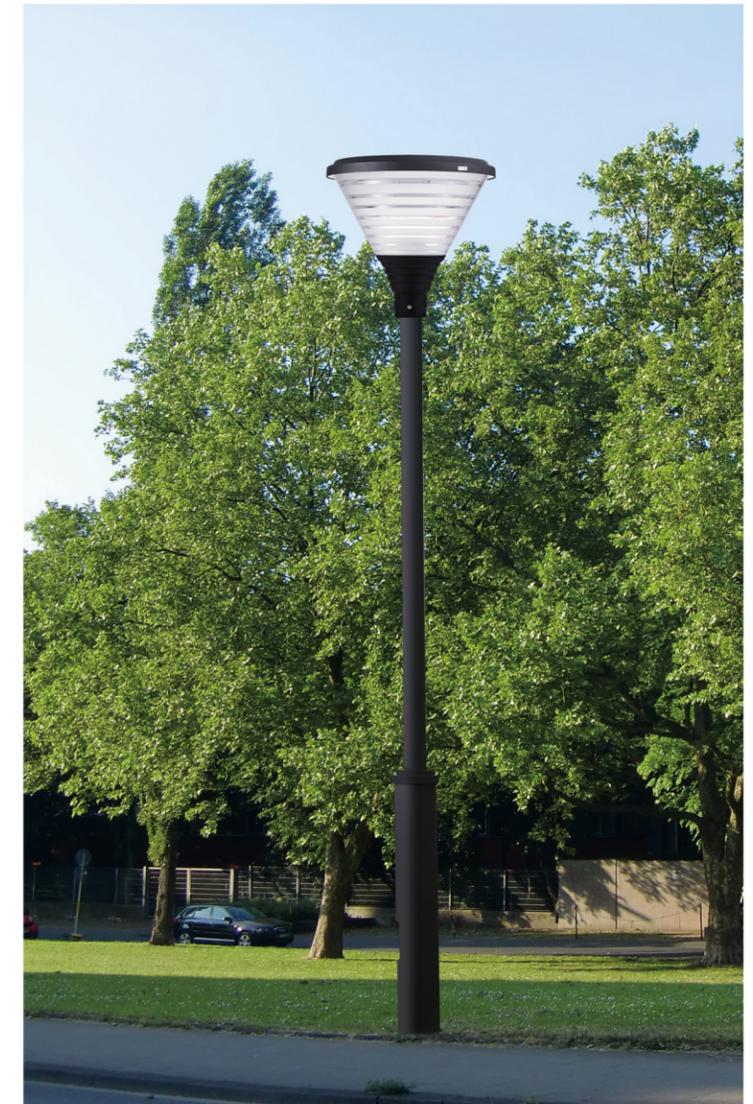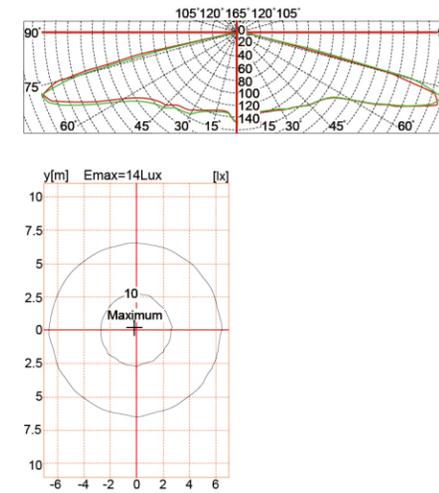


参考颜色 Reference color : RAL 9005

# YMLED-6218B



灯具尺寸 Product Dimensions(mm)

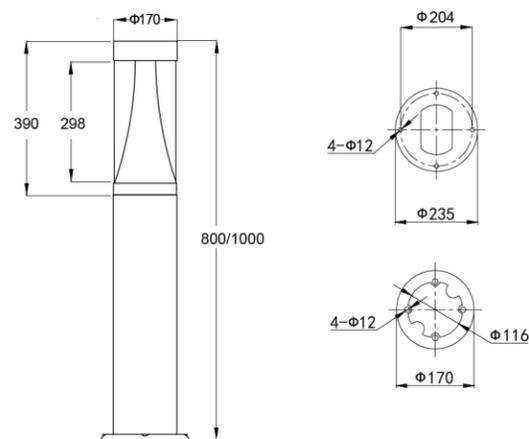

**产品说明：**

整体铝压铸外壳，铝拉制灯杆。  
光学级 PMMA 透光罩。  
氧化铝防眩光反光器。  
铝拉制灯杆

**Product description:**

Aluminum die-casting housing.  
Photogy PMMA Diffuser.  
Anti-glare aluminum oxide reflector.  
Aluminum drawing pole

技术参数数据 TECHNOLOGY DATA


防护等级 Protection grade	防腐等级 Corrnson-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	12W ( SMT )
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	20W ( SMT )



# YM-6201A



灯具尺寸 Product Dimensions(mm)

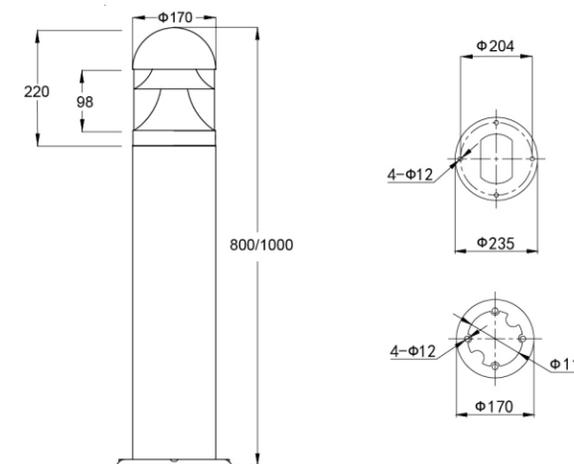

**产品说明：**

整体铝压铸外壳，铝拉制灯杆。  
抗紫外线 PC 灯罩  
高纯度铝板拉伸成型反光器  
整体密封结构

**Product description:**

Lamp housing is made by die cast aluminum, surface treatment for electrostaic powder coating. Diffuser is made by high quality UV-stop PC lens. High-pure aluminum reflector. Sealed lamp housing.

技术参数数据 TECHNOLOGY DATA

防护等级 Protection grade	防腐等级 Corrnson-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	220V(±10%)/50Hz	10W(E27)




YM-6201A

YM-6201B

# YM-6203A



灯具尺寸 Product Dimensions(mm)

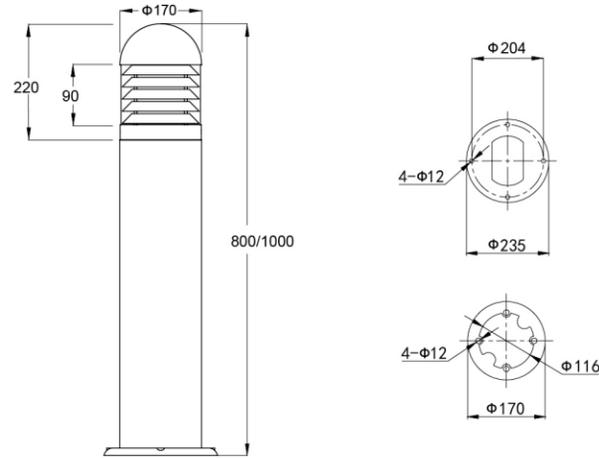

**产品说明：**

整体铝压铸外壳，铝拉制灯杆。  
抗紫外线 PC 灯罩  
高纯度铝板拉伸成型反光器  
整体密封结构

**Product description:**

Lamp housing is made by die cast aluminum, surface treatment for electrostatic powder coating.  
UV-stop PC lamp cover  
High-pure aluminum reflector.  
Sealed lamp housing

技术参数数据 TECHNOLOGY DATA

防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35℃ ~ +45℃	class I	220V(±10%)/50Hz	15W(E27)
IP65	II 类	-35℃ ~ +45℃	class I	100~240V/50Hz	14W(COB)



YM-6203A




YM-6203B

# YM-6204A



灯具尺寸 Product Dimensions(mm)

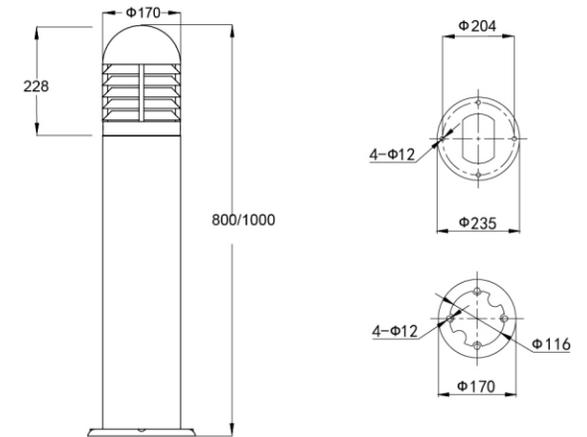

**产品说明：**

整体铝压铸外壳，铝拉制灯杆。  
抗紫外线 PC 灯罩  
高纯度铝板拉伸成型反光器  
整体密封结构

**Product description:**

Lamp housing is made by die cast aluminum, surface treatment for electrostatic powder coating.  
Diffuser is made by high quality UV-stop PC lens.  
High-pure aluminum reflector.  
Sealed lamp housing

技术参数数据 TECHNOLOGY DATA

防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35℃ ~ +45℃	class I	220V(±10%)/50Hz	15W(E27)
IP65	II 类	-35℃ ~ +45℃	class I	100~240V/50Hz	14W(COB)



YM-6204A




YM-6204B

# YM-6205A



灯具尺寸 Product Dimensions(mm)

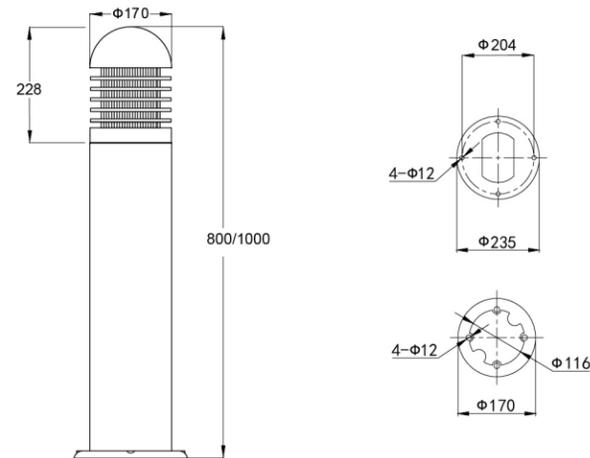

**产品说明：**

整体铝压铸外壳，铝拉制灯杆。  
光学级 PMMA 棱镜格栅  
整体密封结构

**Product description:**

Lamp housing is made by die cast aluminum, surface treatment for electrostatic powder coating.  
Optical grade PMMA prism lens diffuser  
Sealed lamp housing

**技术参数数据 TECHNOLOGY DATA**

防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	220V(±10%)/50Hz	15W(E27)
IP65	II 类	-35°C ~ +45°C	class I	100~240V/50Hz	14W(COB)



YM-6205A




YM-6205B

# YM-6206A



灯具尺寸 Product Dimensions(mm)

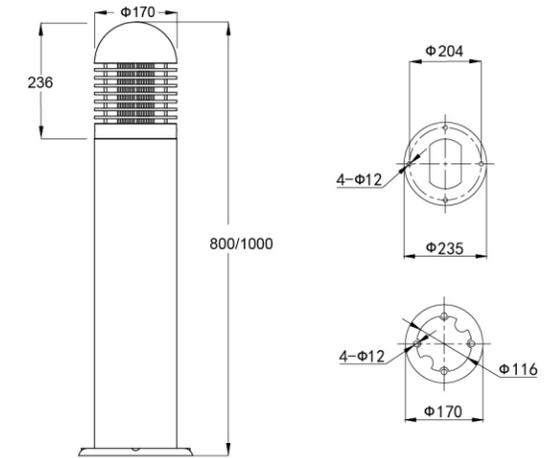

**产品说明：**

整体铝压铸外壳，铝拉制灯杆。  
抗紫外线 PC 灯罩  
高纯度铝板拉伸成型反光器  
整体密封结构

**Product description:**

Lamp housing is made by die cast aluminum, surface treatment for electrostatic powder coating.  
Diffuser is made by high quality UV-stop PC lens.  
High-pure aluminum reflector.  
Sealed lamp housing

**技术参数数据 TECHNOLOGY DATA**

防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	220V(±10%)/50Hz	15W(E27)
IP65	II 类	-35°C ~ +45°C	class I	100~240V/50Hz	14W(COB)



YM-6206A




YM-6206B

# YM-6208



灯具尺寸 Product Dimensions(mm)

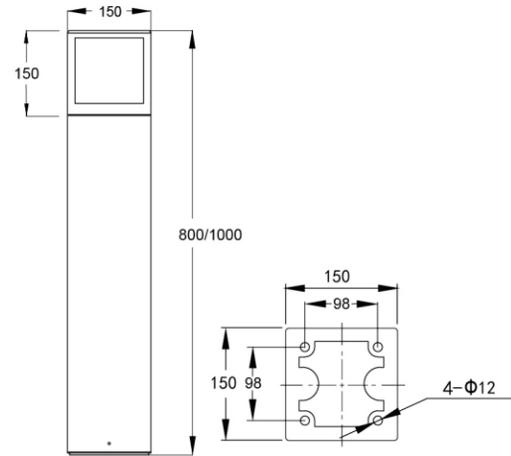

**产品说明：**

整体铝压铸外壳，铝拉制灯杆。  
抗 UV PC 灯罩  
整体密封结构

**Product description:**

Lamp housing is made by die cast aluminum, surface treatment for electrostatic powder coating.  
UV-stop PC lamp cover  
Sealed lamp housing

**技术参数数据 TECHNOLOGY DATA**


防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	220V(±10%)/50Hz	10W(E27)
IP65	II 类	-35°C ~ +45°C	class I	100~240V/50Hz	14W(COB)



# YM-6209A



灯具尺寸 Product Dimensions(mm)

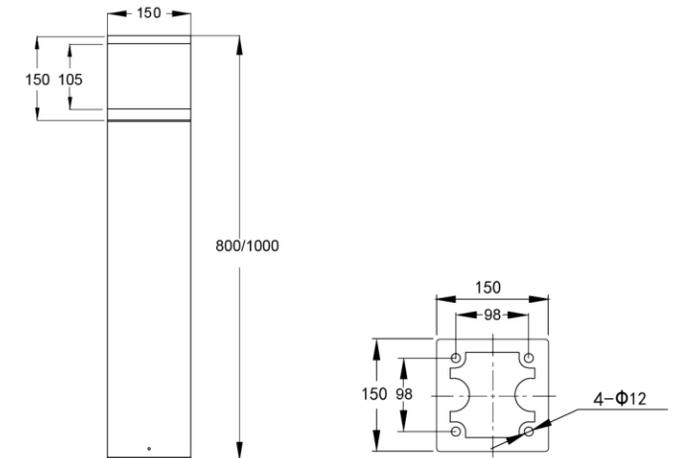

**产品说明：**

整体铝压铸外壳，铝拉制灯杆。  
抗 UV PC 灯罩  
整体密封结构

**Product description:**

Lamp housing is made by die cast aluminum, surface treatment for electrostatic powder coating.  
Diffuser is made by high quality UV-stop PC lens.  
Sealed lamp housing.

**技术参数数据 TECHNOLOGY DATA**

防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	220V(±10%)/50Hz	10W(E27)
IP65	II 类	-35°C ~ +45°C	class I	100~240V/50Hz	14W(COB)



YM-6209A




YM-6209B

# YM-6212



灯具尺寸 Product Dimensions(mm)

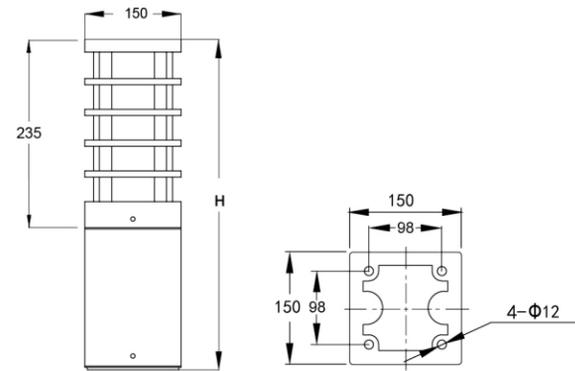

**产品说明：**


整体铝压铸外壳，铝拉制灯杆。  
光学级 PMMA 灯罩  
整体密封结构

**Product description:**

Lamp housing is made by die cast aluminum, surface treatment for electrostatic powder coating.  
Photogy PMMA Diffuser.  
Sealed lamp housing.

**技术参数数据 TECHNOLOGY DATA**


防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	220V(±10%)/50Hz	15W(E27)

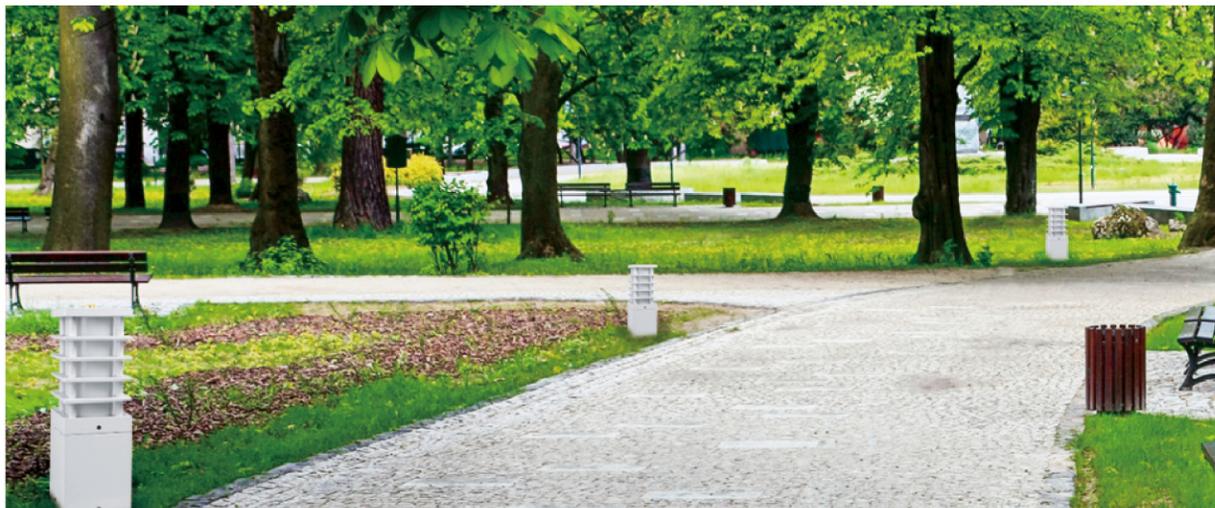

# YM-6217A



灯具尺寸 Product Dimensions(mm)

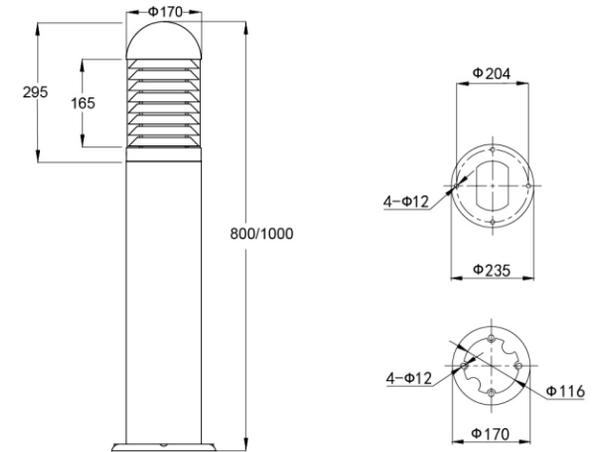

**产品说明：**

整体铝压铸外壳，铝拉制灯杆。  
抗紫外线 PC 灯罩  
高纯度铝板拉伸成型反光器  
整体密封结构

**Product description:**

Lamp housing is made by die cast aluminum, surface treatment for electrostatic powder coating.  
Diffuser is made by high quality UV-stop PC lens.  
High-pure aluminum reflector.  
Sealed lamp housing.

**技术参数数据 TECHNOLOGY DATA**

防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	220V(±10%)/50Hz	20W(E27)
IP65	II 类	-35°C ~ +45°C	class I	220V(±10%)/50Hz	14W(COB)



YM-6217A




YM-6217C

# YMLED-6221



灯具尺寸 Product Dimensions(mm)

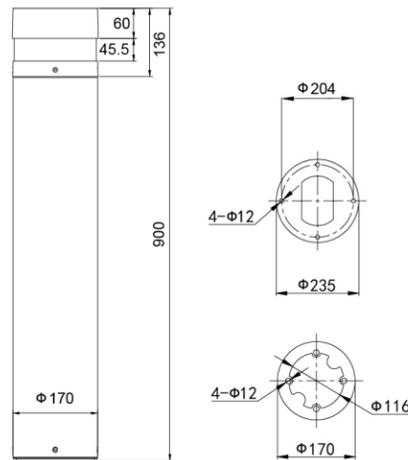

**产品说明：**

整体铝压铸外壳，铝拉制灯杆。  
光学级 PMMA 透光罩  
整体密封结构

**Product description:**

Lamp housing is made by die cast aluminum, surface treatment for electrostaic powder coating. Photogy PMMA Diffuser. Sealed lamp housing

技术参数数据 TECHNOLOGY DATA


防护等级 Protection grade	防腐等级 Corrersion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	12W (SMT)
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	20W (SMT)



# YMLED-6222



灯具尺寸 Product Dimensions(mm)

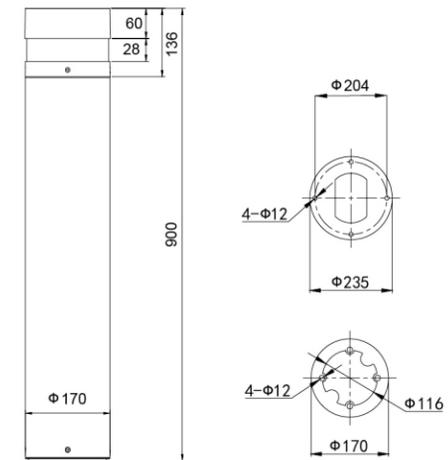

**产品说明：**

整体铝压铸外壳，铝拉制灯杆。  
光学级 PMMA 透光罩  
整体密封结构

**Product description:**

Lamp housing is made by die cast aluminum, surface treatment for electrostaic powder coating. Photogy PMMA Diffuser. Sealed lamp housing

技术参数数据 TECHNOLOGY DATA


防护等级 Protection grade	防腐等级 Corrersion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	12W(SMT)
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	20W(SMT)



# YM-6223



灯具尺寸 Product Dimensions(mm)

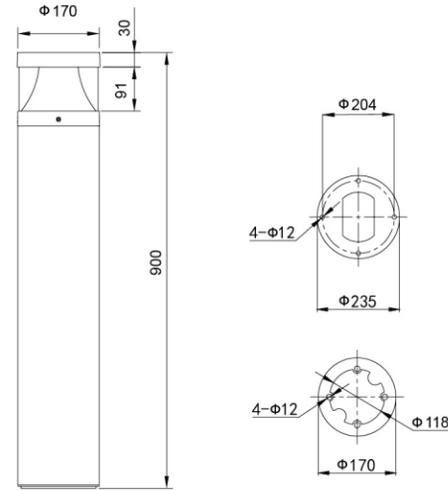

**产品说明：**

整体铝压铸外壳，铝拉制灯杆。  
光学级 PMMA 透光罩  
整体密封结构

**Product description:**

Lamp housing is made by die cast aluminum, surface treatment for electrostatic powder coating. Photogy PMMA Diffuser. Sealed lamp housing

**技术参数数据 TECHNOLOGY DATA**


防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	12W (SMT)
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	20W (SMT)



# YM-6225



灯具尺寸 Product Dimensions(mm)

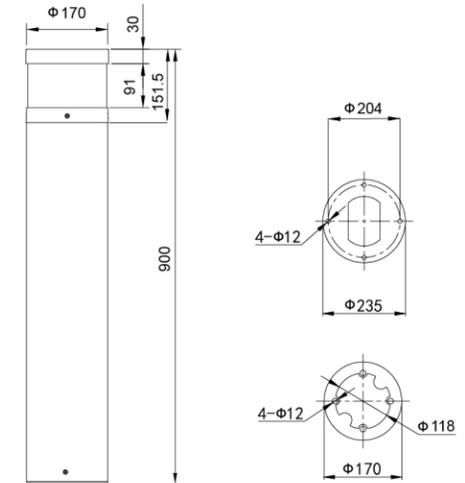

**产品说明：**

整体铝压铸外壳，铝拉制灯杆。  
光学级 PMMA 透光罩  
整体密封结构

**Product description:**

Lamp housing is made by die cast aluminum, surface treatment for electrostatic powder coating. Photogy PMMA Diffuser. Sealed lamp housing

**技术参数数据 TECHNOLOGY DATA**


防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	12W(SMT)
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	20W(SMT)



# YM-6228



灯具尺寸 Product Dimensions(mm)

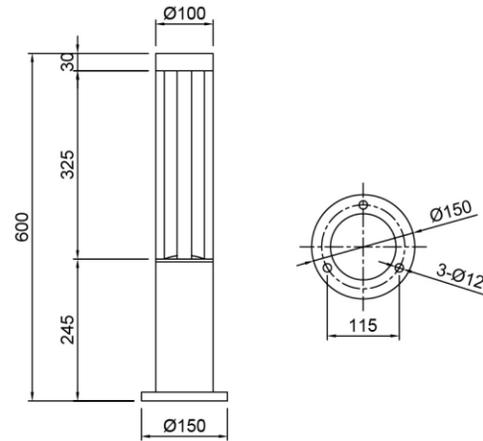

**产品说明：**

整体铝压铸外壳，铝拉制灯杆。  
整体密封结构

**Product description:**

Lamp housing is made by die cast aluminum, surface treatment for electrostatic powder coating.  
Sealed lamp housing.

**技术参数数据 TECHNOLOGY DATA**


防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II类	-35°C ~ +45°C	class I	100~240V/50Hz	7W(COB)



# YMLED-6230



灯具尺寸 Product Dimensions(mm)

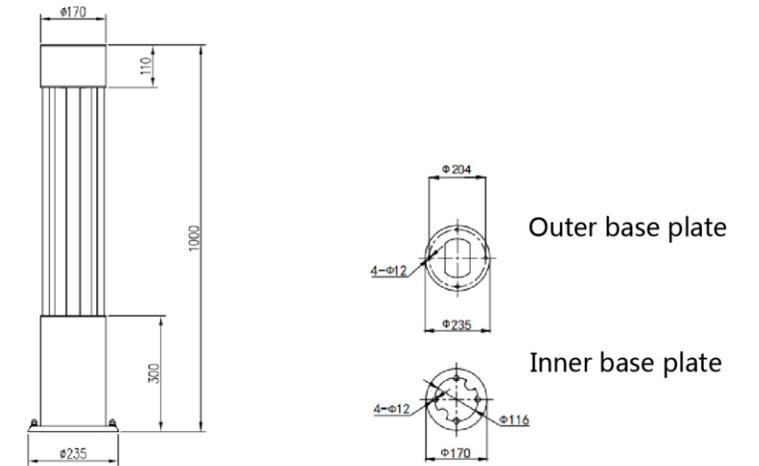

**产品说明：**

整体铝压铸外壳，铝拉制灯杆。  
二次配光技术  
超白钢化玻璃  
模组独立密封结构


**Product description:**

Lamp housing is made by die cast aluminum  
Double photometric diffuser technology  
Supper white toughened glass  
Individual and sealed module

**技术参数数据 TECHNOLOGY DATA**

产品型号 Product code	额定功率 Rated Power	LED颗数 LED Qty	电器绝缘等级 Isolation class	输入电压 Power voltage	光效 Lumen Efficiency
YMLED6230	20W	20	class I	AC100-240V/50Hz	>100LM/W


**配光曲线 Polar Diagram**

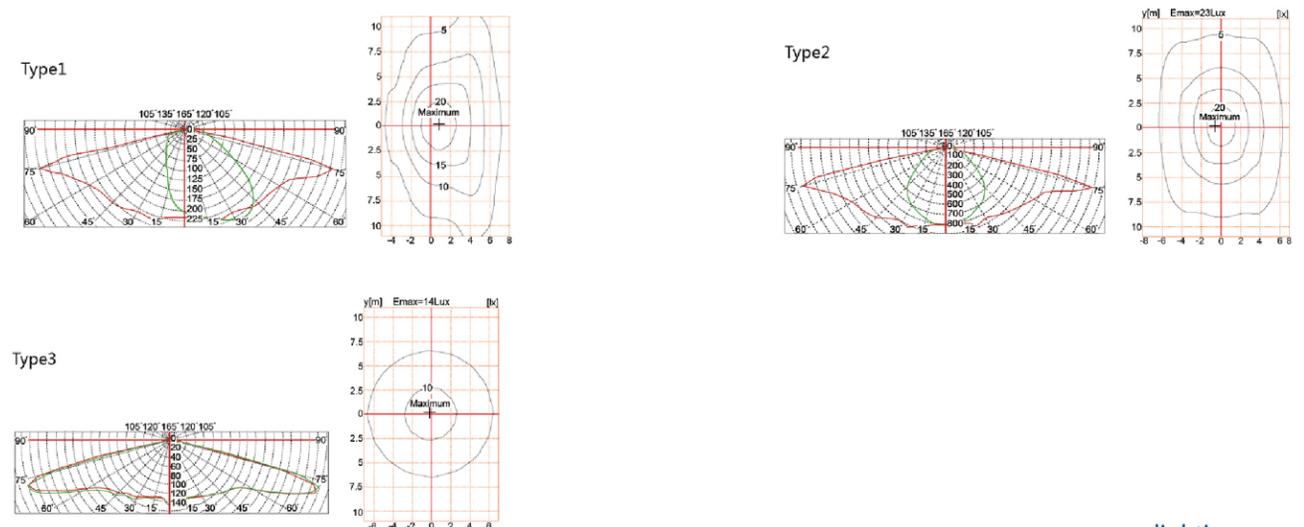

# YMLED-6231



灯具尺寸 Product Dimensions(mm)

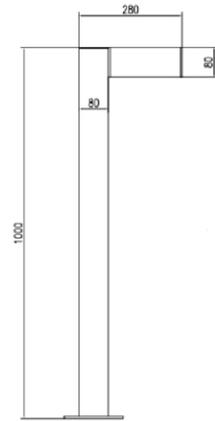

**产品说明 :**

整体铝压铸外壳, 铝拉制灯杆。  
二次配光技术  
超白钢化玻璃  
模组独立密封结构


**Product description:**

Lamp housing is made by die cast aluminum  
Double photometric diffuser technology  
Supper white toughened glass  
Individual and sealed module

**技术参数数据 TECHNOLOGY DATA**

产品型号 Product code	额定功率 Rated Power	LED颗数 LED Qty	电器绝缘等级 Isolation class	输入电压 Power voltage	光效 Lumen Efficiency
YMLED6231	20W	20	class I	AC100-240V/50Hz	>100LM/W


**配光曲线 Polar Diagram**

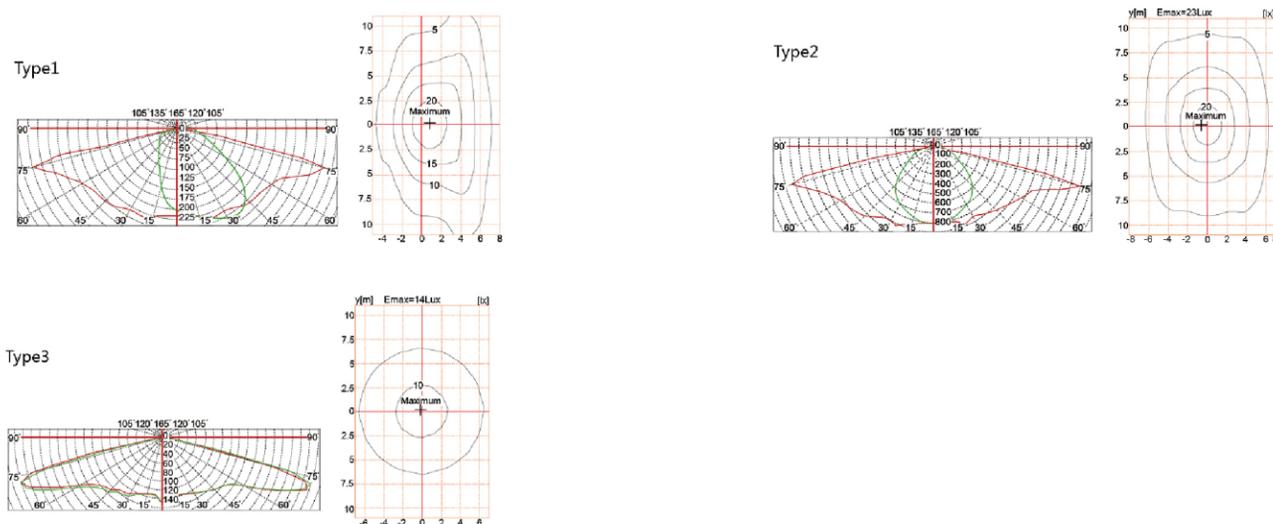

# YM-6235



灯具尺寸 Product Dimensions(mm)

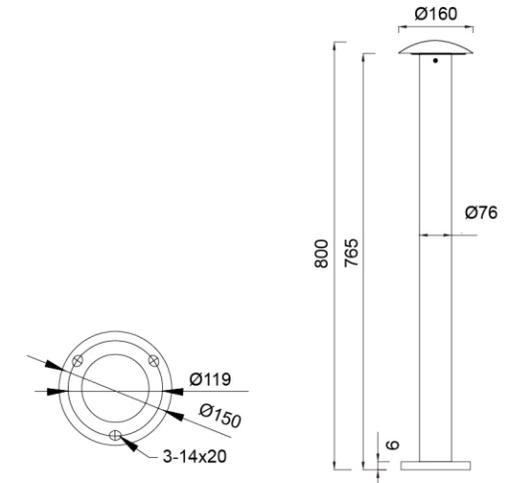

**产品说明 :**

整体铝压铸外壳, 铝拉制灯杆。  
光学级聚碳酸酯透光罩  
整体密封结构

**Product description:**

Aluminum die-casting housing  
Photogy PC Diffuser  
Sealed lamp housing

**技术参数数据 TECHNOLOGY DATA**


防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II类	-35°C ~ +45°C	class I	120~277V 50/60Hz	10W (SMT)
IP65	II类	-35°C ~ +45°C	class I	120~277V 50/60Hz	20W (SMT)



# YM-6236



灯具尺寸 Product Dimensions(mm)

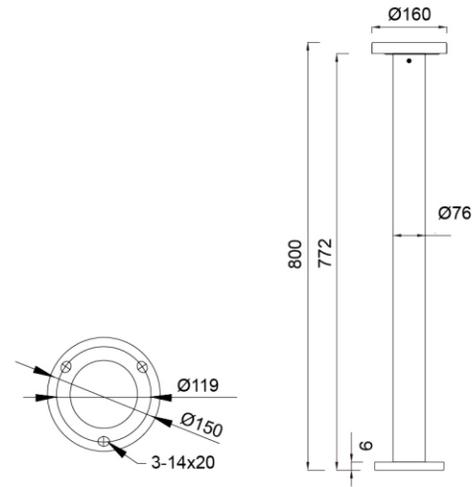

产品说明：

整体铝压铸外壳，铝拉制灯杆  
光学级聚碳酸酯透光罩  
整体密封结构

Product description:

Aluminum die-casting housing  
Photogy PC Diffuser  
Saled lamp housing

技术参数数据 TECHNOLOGY DATA


防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	10W(SMT)
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	20W(SMT)



# YM-6237



灯具尺寸 Product Dimensions(mm)

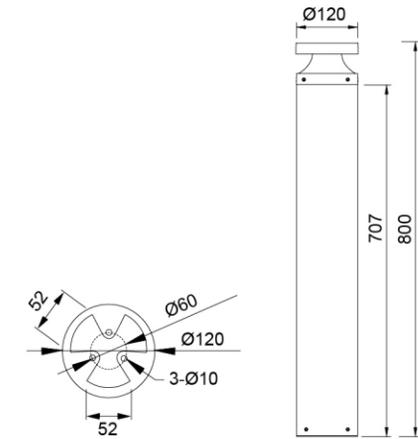

产品说明：

整体铝压铸外壳，铝拉制灯杆  
光学级聚碳酸酯透光罩  
整体密封结构

Product description:

Aluminum die-casting housing  
Photogy PC Diffuser  
Saled lamp housing

技术参数数据 TECHNOLOGY DATA


防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	10W (SMT)
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	20W (SMT)



# YM-6238



灯具尺寸 Product Dimensions(mm)

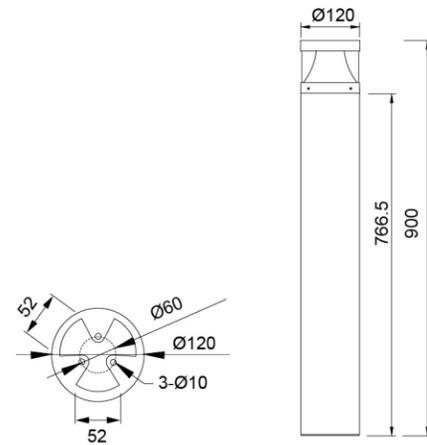

产品说明：

整体铝压铸外壳，铝拉制灯杆  
光学级聚碳酸酯透光罩  
整体密封结构

Product description:

Aluminum die-casting housing  
Photogy PC Diffuser  
Saled lamp housing

技术参数数据 TECHNOLOGY DATA


防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	10W(SMT)
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	15W(SMT)



# YM-6239



灯具尺寸 Product Dimensions(mm)

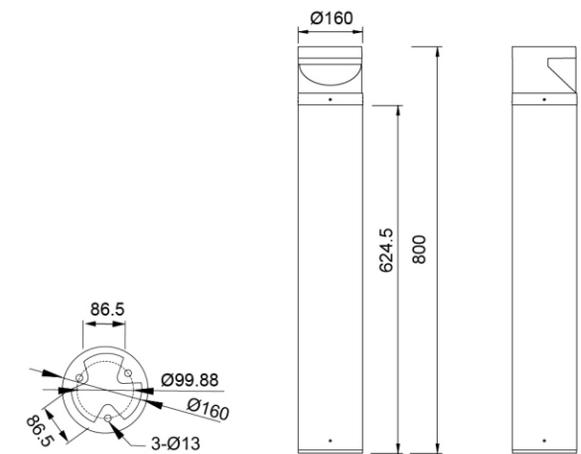

产品说明：

整体铝压铸外壳，铝拉制灯杆  
光学级聚碳酸酯透光罩  
整体密封结构

Product description:

Aluminum die-casting housing  
Photogy PC Diffuser  
Saled lamp housing

技术参数数据 TECHNOLOGY DATA

防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	10W (SMT)
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	20W (SMT)






# YM-6242



灯具尺寸 Product Dimensions(mm)

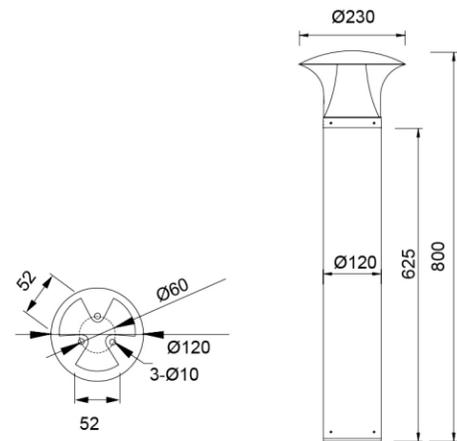

产品说明：

整体铝压铸外壳，铝拉制灯杆  
光学级聚碳酸酯透光罩  
整体密封结构

Product description:

Aluminum die-casting housing  
Photogy PC Diffuser  
Saled lamp housing

技术参数数据 TECHNOLOGY DATA


防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II类	-35℃ ~ +45℃	class I	120~277V 50/60Hz	10W (SMT)
IP65	II类	-35℃ ~ +45℃	class I	120~277V 50/60Hz	20W (SMT)



# YM-6243



灯具尺寸 Product Dimensions(mm)

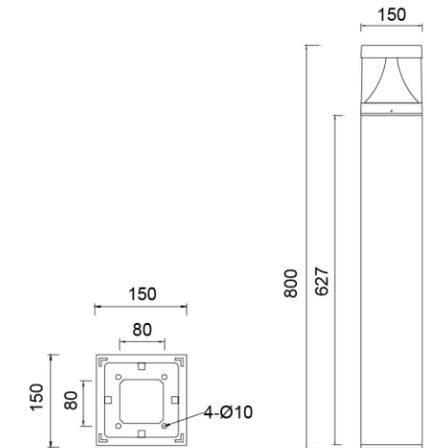

产品说明：

整体铝压铸外壳，铝拉制灯杆  
光学级聚碳酸酯透光罩  
整体密封结构

Product description:

Aluminum die-casting housing  
Photogy PC Diffuser  
Saled lamp housing

技术参数数据 TECHNOLOGY DATA


防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II类	-35℃ ~ +45℃	class I	120~277V 50/60Hz	10W (SMT)
IP65	II类	-35℃ ~ +45℃	class I	120~277V 50/60Hz	20W (SMT)



# YM-6245



灯具尺寸 Product Dimensions(mm)

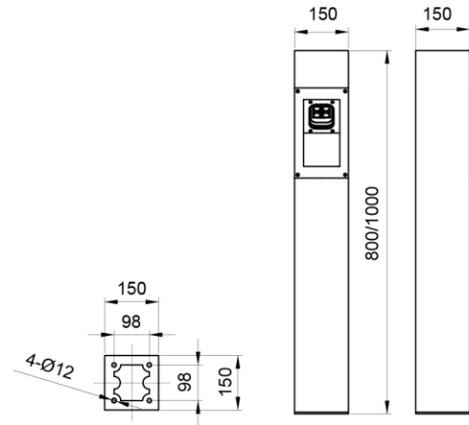

**产品说明：**

整体铝压铸外壳，铝拉制灯杆  
配有 4mm 钢化玻璃  
整体密封结构

**Product description:**

Aluminum die-casting housing  
Equipped with 4mm tempered glass  
Saled lamp housing

**技术参数数据 TECHNOLOGY DATA**


防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	10W (SMT)



# YM-6246



灯具尺寸 Product Dimensions(mm)

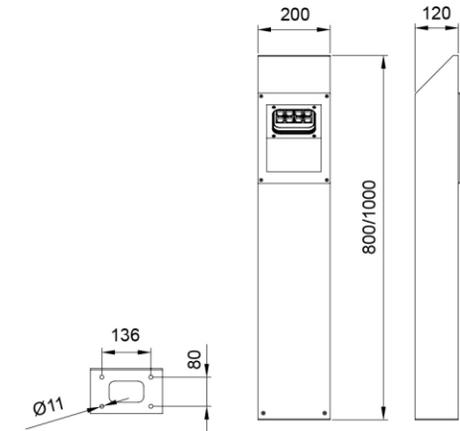

**产品说明：**

整体铝压铸外壳，铝拉制灯杆  
配有 4mm 钢化玻璃  
整体密封结构

**Product description:**

Aluminum die-casting housing  
Equipped with 4mm tempered glass  
Saled lamp housing

**技术参数数据 TECHNOLOGY DATA**

防护等级 Protection grade	防腐等级 Corrosion-proof capability	环境温度 Working condition	电器绝缘等级 Isolation class	输入电压 Power voltage	功率 Max power
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	10W(SMT)
IP65	II 类	-35°C ~ +45°C	class I	120~277V 50/60Hz	20W(SMT)






**产品说明：**  
 铝压铸外壳  
 16-24 颗 LEDs  
 2 次配光设计，3 种配光方式  
 钢化玻璃面罩

**Product description:**  
 Die cast Aluminum housing  
 16-24LEDs in one modul  
 Double optical design for different roads,3 kinds of optical lens for choose  
 Tempered glass screen can be clear or frosted galss

灯具尺寸 Product Dimensions(mm)

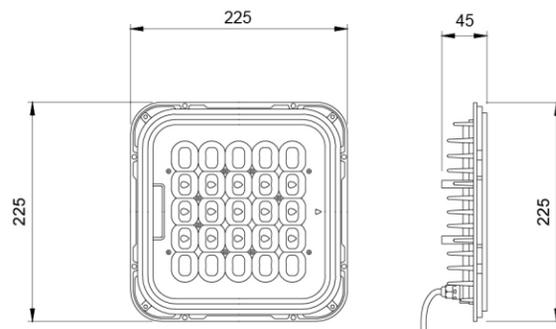



配置数据 /Configuration Data:

产品型号 Product Code	额定功率 Rated Power (led current 700mA)	初始光通量 Nominal inital FLUX	LED 颗数 LED Qty	毛净重 G.W/N.W	包装尺寸 Packing Size
ym6701(16)	30W	4320lm	16	2(kgs)	230*230*50MM
ym6701(20)	40W	5400lm	20	2(kgs)	230*230*50MM
ym6701(24)	55W	7140lm	24	2(kgs)	230*230*50MM





配光曲线 Polar Diagram



Type1

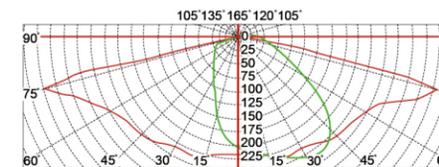


Type 2

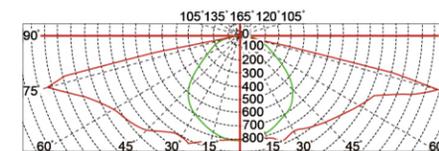

Type 3

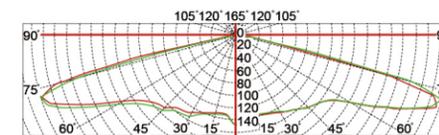


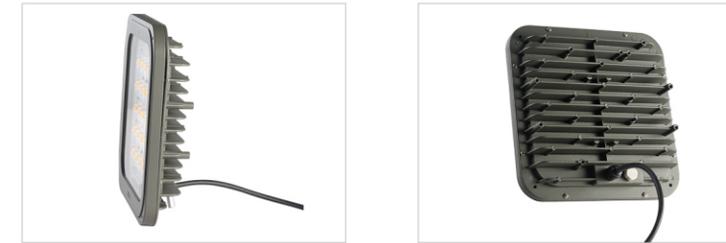

**产品说明：**  
 铝压铸外壳  
 16-24颗LEDs  
 2次配光设计，3种配光方式  
 钢化玻璃面罩

**Product description:**  
 Die cast Aluminum housing  
 16-24LEDs in one moduel  
 Double optical design for different roads,3 kinds of optical lens for choose  
 Tempered glass screen can be clear or frosted galss

灯具尺寸 Product Dimensions(mm)


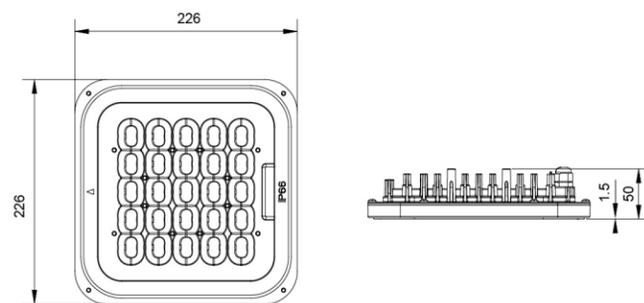


**配置数据 /Configuration Data:**



产品型号 Product Code	额定功率 Rated Power (led current 700mA)	初始光通量 Nominal inital FLUX	LED 颗数 LED Qty	毛净重 G.W/N.W	包装尺寸 Packing Size
ym6701g(16)	30W	3960lm	16	2(kgs)	230*230*50MM
ym6701g(20)	40W	4950lm	20	2(kgs)	230*230*50MM
ym6701g(24)	55W	6545lm	24	2(kgs)	230*230*50MM

**配光曲线 Polar Diagram**



Type1

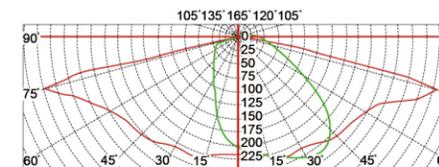

Type 2

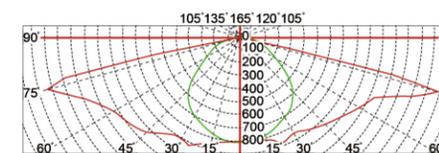

Type 3

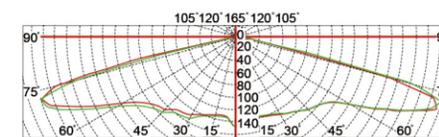




**产品说明：**  
 铝压铸外壳  
 16-32 颗灯珠  
 2次配光设计，3种配光方式

**Product description:**  
 Die cast Aluminum housing  
 16-32 beads  
 Double optical design for different roads,3 kinds of optical lens for choose

灯具尺寸 Product Dimensions(mm)


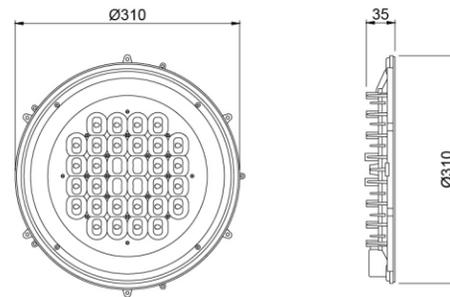


配置数据 / Configuration Data:



产品型号 Product Code	额定功率 Rated Power (led current 530mA)	初始光通量 Nominal initial FLUX	LED 颗数 LED Qty	毛净重 G.W/N.W	包装尺寸 Packing Size
ym6702(16)	30W	3960lm	16	2(kgs)	330*330*45MM
ym6702(20)	40W	5280lm	20	2(kgs)	330*330*45MM
ym6702(24)	55W	7260lm	24	2(kgs)	330*330*45MM
ym6702(28)	60W	2920lm	28	2(kgs)	330*330*45MM
ym6702(32)	70W	9240lm	32	2(kgs)	330*330*45MM

配光曲线 Polar Diagram



Type1

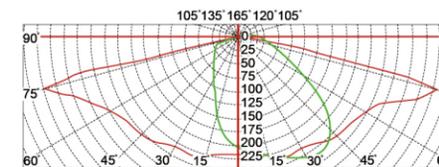

Type 2

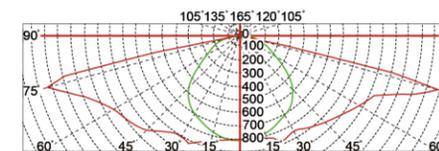

Type 3

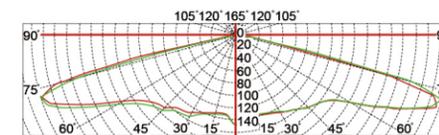


# Pole ( PA series ) / PA 系列灯杆

## 产品说明：

整体焊接后热镀锌处理  
表面喷塑  
抗风速 36m/s

## Product description:

Hot-dip galvanizing after overall welding  
Surface spray  
Wind resistance 36m/s

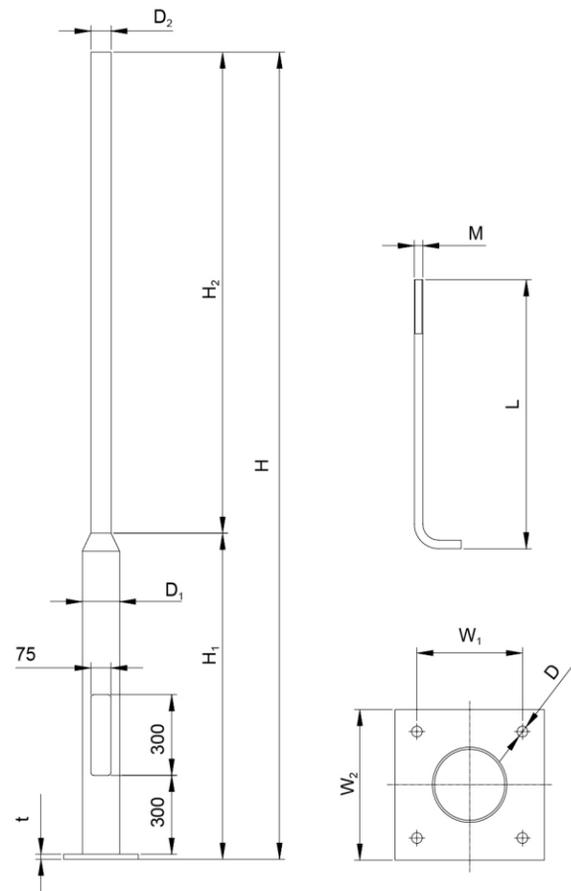

	H	H <sub>1</sub>	H <sub>2</sub>	D <sub>1</sub>	D <sub>2</sub>	W <sub>1</sub>	W <sub>2</sub>	t	D	L	M	Weight
PA1-3	3000	1200	1800	140	60	198	280	12	20	500	16	27.2
PA2-3	3000	1200	1800	140	76	198	280	12	20	500	16	29.3
PA1-3.5	3500	1200	2300	140	60	198	280	12	20	500	16	29.3
PA2-3.5	3500	1200	2300	140	76	198	280	12	20	500	16	32
PA1-4	4000	1200	2800	140	60	198	280	12	20	500	16	31.4
PA2-4	4000	1200	2800	140	76	198	280	12	20	500	16	34.7

# Pole ( PB series ) / PB 系列灯杆




## 产品说明：

整体焊接后热镀锌处理  
表面喷塑  
抗风速 36m/s

## Product description:

Hot-dip galvanizing after overall welding  
Surface spray  
Wind resistance 36m/s

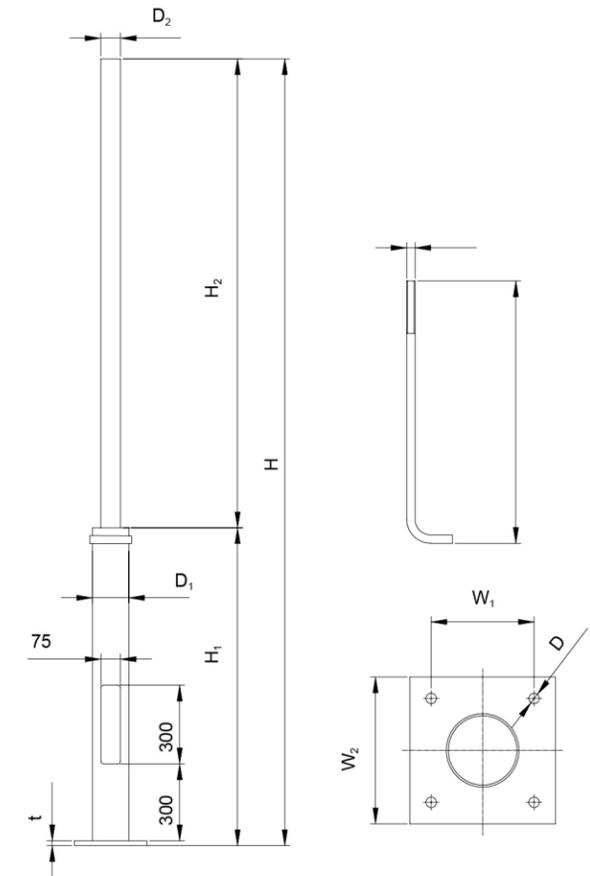

	H	H <sub>1</sub>	H <sub>2</sub>	D <sub>1</sub>	D <sub>2</sub>	W <sub>1</sub>	W <sub>2</sub>	t	D	L	M	Weight
PB1-3	3000	1200	1800	140	60	198	280	12	20	500	16	27.2
PB2-3	3000	1200	1800	140	76	198	280	12	20	500	16	29.8
PB1-3.5	3500	1200	2300	140	60	198	280	12	20	500	16	29.8
PB2-3.5	3500	1200	2300	140	76	198	280	12	20	500	16	32.5
PB1-4	4000	1200	2800	140	60	198	280	12	20	500	16	32
PAB	4000	1200	2800	140	76	198	280	12	20	500	16	35.5

# Pole ( PC series ) / PC 系列灯杆

**产品说明：**

整体焊接后热镀锌处理

表面喷塑


抗风速 36m/s

**Product description:**

Hot-dip galvanizing after overall welding

Surface spray

Wind resistance 36m/s

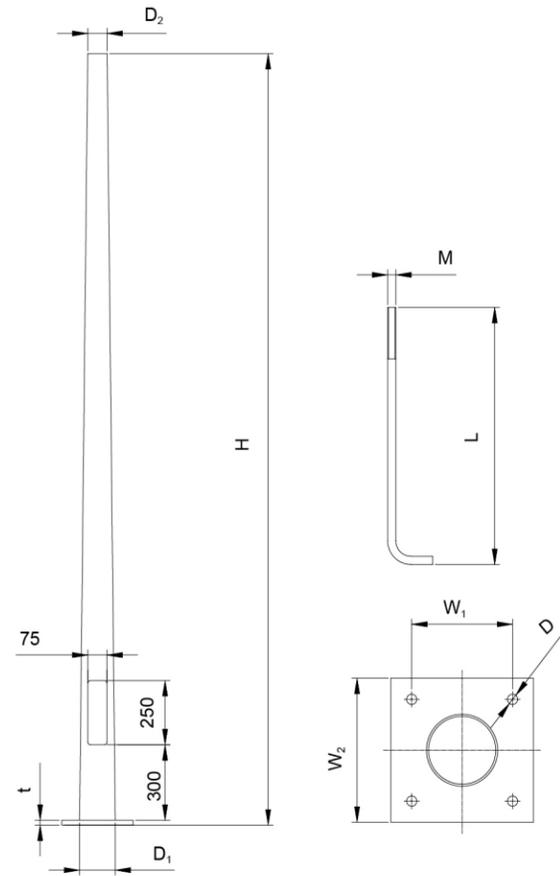

	H	D <sub>1</sub>	D <sub>2</sub>	W <sub>1</sub>	W <sub>2</sub>	t	D	L	M	Weight
PC1-4	4000	118	60	198	280	12	20	500	16	34.3
PC2-4	4000	134	76	198	280	12	20	500	16	39
PC1-5	5000	130	60	198	280	12	20	500	16	43.2
PC2-5	5000	146	76	198	280	12	20	500	16	49.1
PC1-6	6000	142	60	198	280	14	22	600	18	53
PC2-6	6000	158	76	198	280	14	22	600	18	60.1
PC1-7	7000	154	60	198	280	14	22	600	18	63.8
PC2-7	7000	170	76	198	280	14	22	600	18	72